

theRonda P360-100 WH GST

Item no.: 2080010

theben
energy saving comfort

Presence and motion detectors Indoor detectors

Description

- Presence detector (PIR), with pre-configured cable and Wieland GSTi18 connector, cable length 1,50 meter
- Passive infrared presence detector for ceiling mounting
- Round detection area 360°, up to Ø 24 m (452 m²)
- Automatic presence- and brightness-dependent control for lighting
- Mixed light measurement suitable for fluorescent lamps (FL/PL/ESL), halogen/incandescent lamps and LEDs
- Channel A, light: relay, 230V
- Adjustable brightness switching value, teach-in function
- Reduction of switch-off delay time in the event of short presence (brief-presence)
- Pulse function for staircase light time switch
- Sensitivity adjustable
- Detection area can be limited using cover clip
- Ready for immediate use due to factory preset
- Test mode for checking function and detection area
- User remote control theSenda S, management remote control SendaPro (optional)



Technical data

theRonda P360-100 WH GST	
Operating voltage	110 – 230 V AC
Frequency	50 – 60 Hz
Installation height	2 – 10 m
Minimum height	> 1,7 m
Installation type	Ceiling installation
Colour	White
Switching output	Light
Stand-by consumption	~0.15 W

theRonda P360-100 WH GST	
Light measurement	Mixed light measurement
Setting range brightness	30 – 3000 lx
Light switch-off delay	10 s - 60 min
Lamps	Incandescent/halogen lamp, fluorescent lamps, Energy saving lamps, LEDs
Incandescent/halogen lamp load	2300 W
Compact and fluorescent lamps	1150 VA (cos φ = 0,5)

Subject to technical changes and misprints

additional information at: www.theben.de/product/2080010

The load data are determined with exemplary selected illuminants and are therefore typical data due to the large number of available products.

18/05/2021

Page 1 of 3

theRonda P360-100 WH GST

Item no.: 2080010


Technical data

theRonda P360-100 WH GST	
LED lamp < 2 W	60 W
LED lamp 2-8 W	600 W
LED lamp > 8 W	600 W
Type of connection	Screw terminals

theRonda P360-100 WH GST	
Max. cable cross section	max. 2 x 2,5 mm ²
Ambient temperature	-15°C ... 50°C
Type of protection	IP 54 (when fitted)

Detection range for planning applications

Mounting height (A)	Sitting (S)	Diagonally (T)
2 m	16 m ² 4,5 m	380 m ² 22 m
2.5 m	24 m ² 5,5 m	415 m ² 23 m
3 m	28 m ² 6 m	452 m ² 24 m
3.5 m	38 m ² 7 m	452 m ² 24 m
6 m		452 m ² 24 m
10 m		491 m ² 25 m

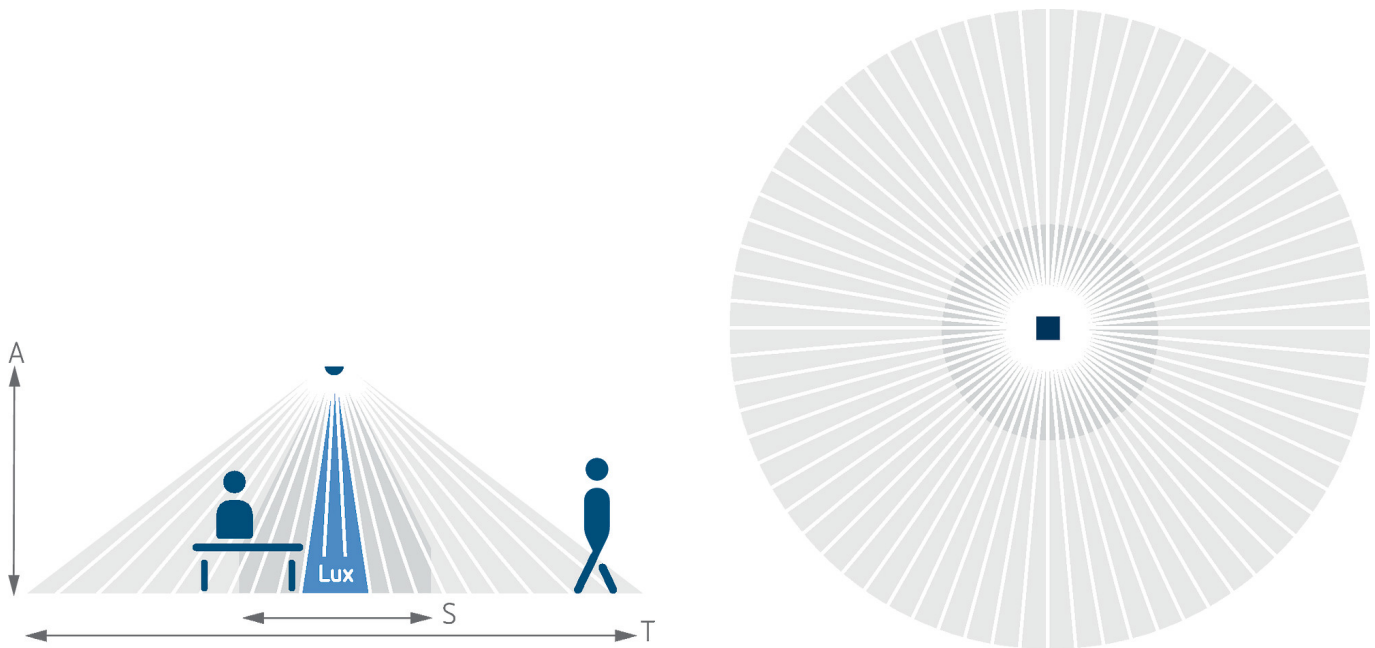

Detection range according to Sensnorm IEC 63180

Mounting height (A)	Diagonally (T)	Head on to (R)	Sitting (S)
2.5 m	434 m ² 23.5 m	55 m ² 8.4 m	50 m ² 8 m
10 m	707 m ² 30 m	79 m ² 10 m	
15 m	616 m ² 28 m	141 m ² 13.4 m	

Subject to technical changes and misprints

additional information at: www.theben.de/product/2080010

The load data are determined with exemplary selected illuminants and are therefore typical data due to the large number of available products.

theRonda P360-100 WH GST

Item no.: 2080010

Accessories

theSenda P

Item no.: 9070910




theSenda S

Item no.: 9070911




Masking clip

Item no.: 9070921



QuickSafe

Item no.: 9070531



theSenda B

Item no.: 9070985

