

# theben

307062 03

**EN** LED spotlight with motion detector

theLeda E10 WH	1020911
theLeda E10 BK	1020912
theLeda E20 WH	1020913
theLeda E20 BK	1020914



## 1. Basic safety information



**WARNING**

**Danger of death through electric shock or fire!**

➤ Installation should only be carried out by a qualified electrician!

- The LED spotlight with motion detector (PIR) conforms to EN 60598-1 if correctly installed
- Only intended for installation outside of arm's reach

### Proper use


- LED spotlight is used for lighting, depending on presence and brightness
- Intended for wall mounting outdoors
- Suitable for corridors, gardens, entrances, parks etc.
- For use in normal ambient conditions

### Disposal

Dispose of LED spotlight in an environmentally sound manner (electronic waste)

## 2. Description

LED spotlight

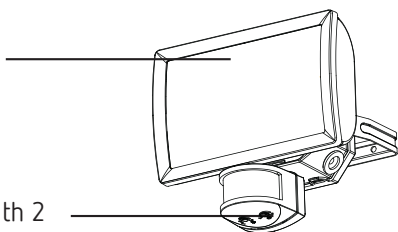

Sensor head with 2 potentiometers for setting time (min.) and brightness (lux)


## 3. Connection




**WARNING**

**Danger of death through electric shock!**

- Disconnect power source
- Ensure device cannot be switched on
- Check absence of voltage
- Earth and bypass
- Cover or shield any adjacent live components

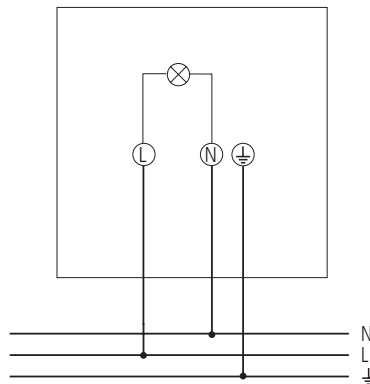


➤ Do not touch the metal parts. The device can get hot.




## 4. Installation



➤ Ensure installation height of 2.5 m.




➤ Use the accompanying mounting bar for flexible installation and cable entry.




➤ Disconnect power source.




- Make marks for the holes and drill the holes.
- Tighten the mounting bar.




➤ Feed cable through the seal of the base.




➤ Fix cord grip and tighten screws.



➤ Connect the individual wires to the appropriate terminal.

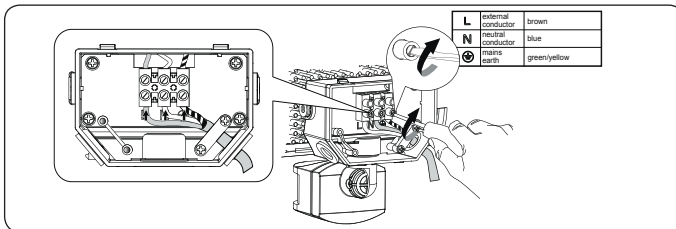

➤ Tighten screws.


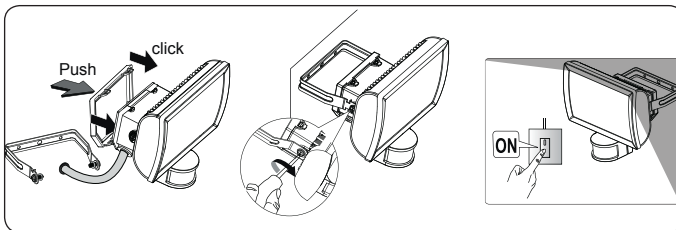


- Place and engage the cover on the LED spotlight.
- Place the LED spotlight on the mounting bar and tighten screws.
- Connect LED spotlight to mains.

## Installation instructions

As the LED spotlight reacts to variations in temperature, avoid the following situations:

- Do not direct motion detectors (PIR) of the LED spotlight at objects with highly-reflective surfaces, such as mirrors etc.
- Do not install motion detectors near heat sources, such as heating outlets, air conditioning systems, lamps etc.
- Do not direct the motion detector at objects that move in the wind, such as curtains, large plants etc.
- Pay attention to the direction of motion during the test run.

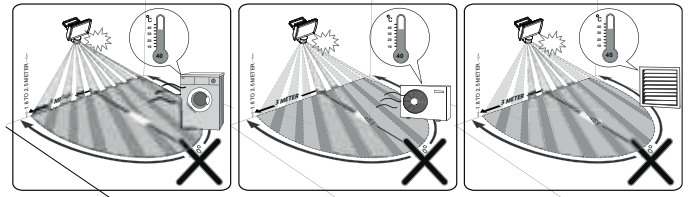

- Transverse detection area: 12 m (transversal to the detector)
- Frontal detection area: 4 m (directly approaching the detector)
- Detection angle: 180 °


## 5. Walking test

The walking test is used to test the detection area and to restrict it if necessary.

- Turn the time potentiometer (min.) counterclockwise up to the stop.



The motion detector now only reacts to movements (independent of brightness).

- Walk across the detection area. After the LED spotlight has detected a movement, it switches on for 2 s.
- Pay attention to the direction of motion during the test.

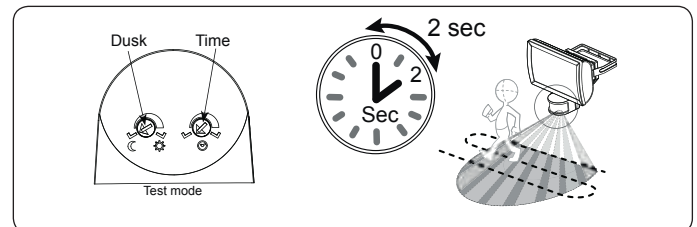


## 6. Alignment

- The sensor can be rotated to left/right and down by 90 °.
- The LED spotlight can be rotated up by 45 ° and down by 60 °.




## Limiting the detection area - using stickers

- Use the supplied stickers to adjust the motion detector to the desired detection area.
- Remove the required section of the sticker by using scissors.
- Then place on the lens.

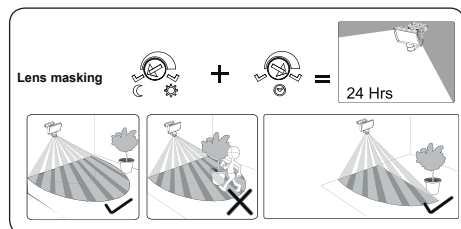

## 7. Setting

The LED spotlight has 2 potentiometers for setting time (min.) and brightness (lux).

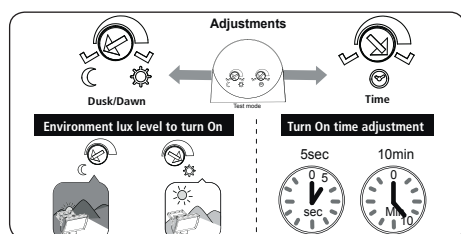

### Setting the brightness (lux)

- Turn the potentiometer to „Moon“; the LED spotlight only switches on when it is relatively dark.
- Turn the potentiometer to „Sun“; the LED spotlight switches on when it is relatively bright.



- Turn the potentiometer to „Sun“, and the device works independent of brightness.



### Setting the time (min.)

- Set the potentiometer to the desired time (5 s - 10 min.).




### Manual operation

The lighting can be manually switched on/off via a circuit breaker button.

- ① The surrounding brightness must be below the set value!

- ① A circuit breaker button must be connected.

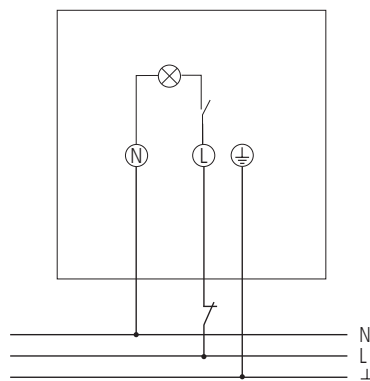

- Shortly press the circuit breaker button (max. 1.5 seconds)  
→ The lighting remains switched on, until the surrounding brightness exceeds the set value.
- In order to switch off the lighting, shortly press the circuit breaker button (max. 1.5 seconds).

### Setting the twilight switch function

- Turn the time potentiometer (min.) clockwise up to the stop.  
→ The twilight switch function is activated.
- ① Now, the motion detector does not respond to movements anymore.

- ① The connected spotlight switches on at the set surrounding brightness

**CAUTION!**



## 8. Technical data

- Operating voltage: 230 V AC  $\pm 10\%$
- Frequency: 50–60 Hz
- Consumption with light ON:
  - theLeda E10: 10.3 W
  - theLeda E20: 17.7 W
- Standby output: max. 0.5 W
- LED output (luminous flux):
  - theLeda E10 WH: 750 lm
  - theLeda E10 BK: 685 lm
  - theLeda E20 WH: 1325 lm
  - theLeda E20 BK: 1260 lm
- Lamp type: LED 10 W, 20 W (not dimmable)
- Protection rating: IP 55 in accordance with EN 60598-1
- Protection class: I in accordance with EN 60598-1
- Operating temperature:  $-20\text{ °C} \dots +40\text{ °C}$
- Brightness setting range: 2 – 200 lx
- Duty cycle range: 5 s – 10 min
- Detection angle: 180 °

- Detection area: transverse: max. 12 m;  
frontal: max. 4 m
- Installation height: 2.5 m
- Sensor head can be rotated right/left, down by: 90°, 90°
- Spotlight can be rotated up by: 45° and down by: 60°
- Energy efficiency class: A+

## 9. Contact

### **Theben AG**

Hohenbergstraße 32

72401 Haigerloch

GERMANY

Phone: +49 7474 692-0

Fax: +49 7474 692-150

### **Hotline**

Phone: +49 7474 692-369

hotline@theben.de

www.theben.de