

Description




- Individual room thermostat LUXORliving
- Setting range 5 - 30°C
- Applications: heating via radiator or underfloor heating, heating and cooling e.g. radiator or cooling ceiling
- Integrated 4-way binary input sensor interface

Technical data

Operating voltage KNX	Bus voltage, <12 mA
Installation type	Surface-mounted
Interface extension max.	30 m
Ambient temperature	+5 °C ... +40 °C
Measuring range temperature	-5 °C ... +45 °C
Setting range temperature	+5 °C ... +30 °C
Contact voltage	5 V Internal provided
Contact current	0,5 mA
Type of protection	IP 20
Protection class	III according to EN 60 730-1

Connection example

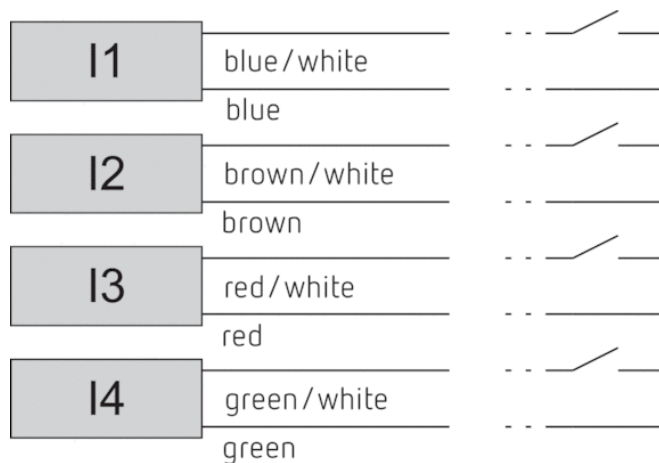

Scale drawings

