

Description




- 4-way switching actuator LUXORliving
- LED switching status display for each channel
- Manual operation on device
- Switching functions: On/Off, pulse, On/Off delay, staircase light with warning

Technical data

| | |
|---|-----------------------|
| Operating voltage KNX | <4 mA |
| Operating voltage | 110 – 240 V AC |
| Stand-by consumption | <0,3 W |
| Installation type | DIN rail |
| Width | 4 modules |
| Number of channels | 4 |
| Type of contact | NO contact, 16 A, 3 A |
| Fluorescent lamp load (conventional) parallel-corrected | 1300 W (140 µF) |
| Fluorescent lamp load (conventional) not corrected | 2000 VA |
| Fluorescent lamp load (electronic ballast) | 1200 W |
| Energy saving lamps | 300 W |
| LED lamp < 2 W | 55 W |
| LED lamp 2-8 W | 600 W |
| LED lamp > 8 W | 600 W |
| Inrush current | max. 800 A / 200 µs |
| C load | – |
| Type of protection | IP 20 |
| Protection class | II |

Connection example

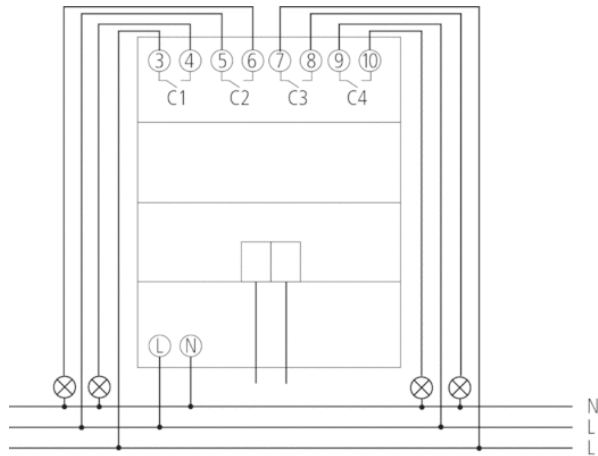

Scale drawings

