LUXORliving J4-6

Item no.: 4800451

theben

Smart Home
Actuators DIN rail and gateways

Description

- 4-way LUXORliving blind actuator
- ith integrated inputs for the push buttons, as a replacement for drive control of the LUXOR living comfort control
- Allows an easy system change for existing LUXOR customers to LUXORliving
- For controlling drives for blinds, roller blinds, as well as sun and vision protection devices
- Manual operation on the device (even without bus voltage)
- LED Up and Down switching status indicator for each channel
- Features: 8 relay outputs for 4 drives (Up/Down), 4 inputs for individual operation of the drives (230 V), 2 inputs for central and group operation (230 V)
- The relay outputs are not floating or potential-independent, but are powered by the supply voltage
- This means that all drives connected to the actuator are controlled via the same phase. This has to be considered when changing from LUXOR to LUXORliving
- Download of the installation software LUXORplug at https://luxorliving.de/luxorplug

Technical data

	LUXORliving J4-6
Operating voltage KNX	<10 mA
Operating voltage	230 V AC
Stand-by consumption	<0.2 W
Number of channels	4
Width	4 modules
Installation type	DIN rail

	LUXORliving J4-6
Output	NO contact, 6 A
Switching output	Potential-free, for SELV, if the whole device switches SELV
Type of protection	IP 20
Protection class	II according to EN 60 669

Wiring Diagrams


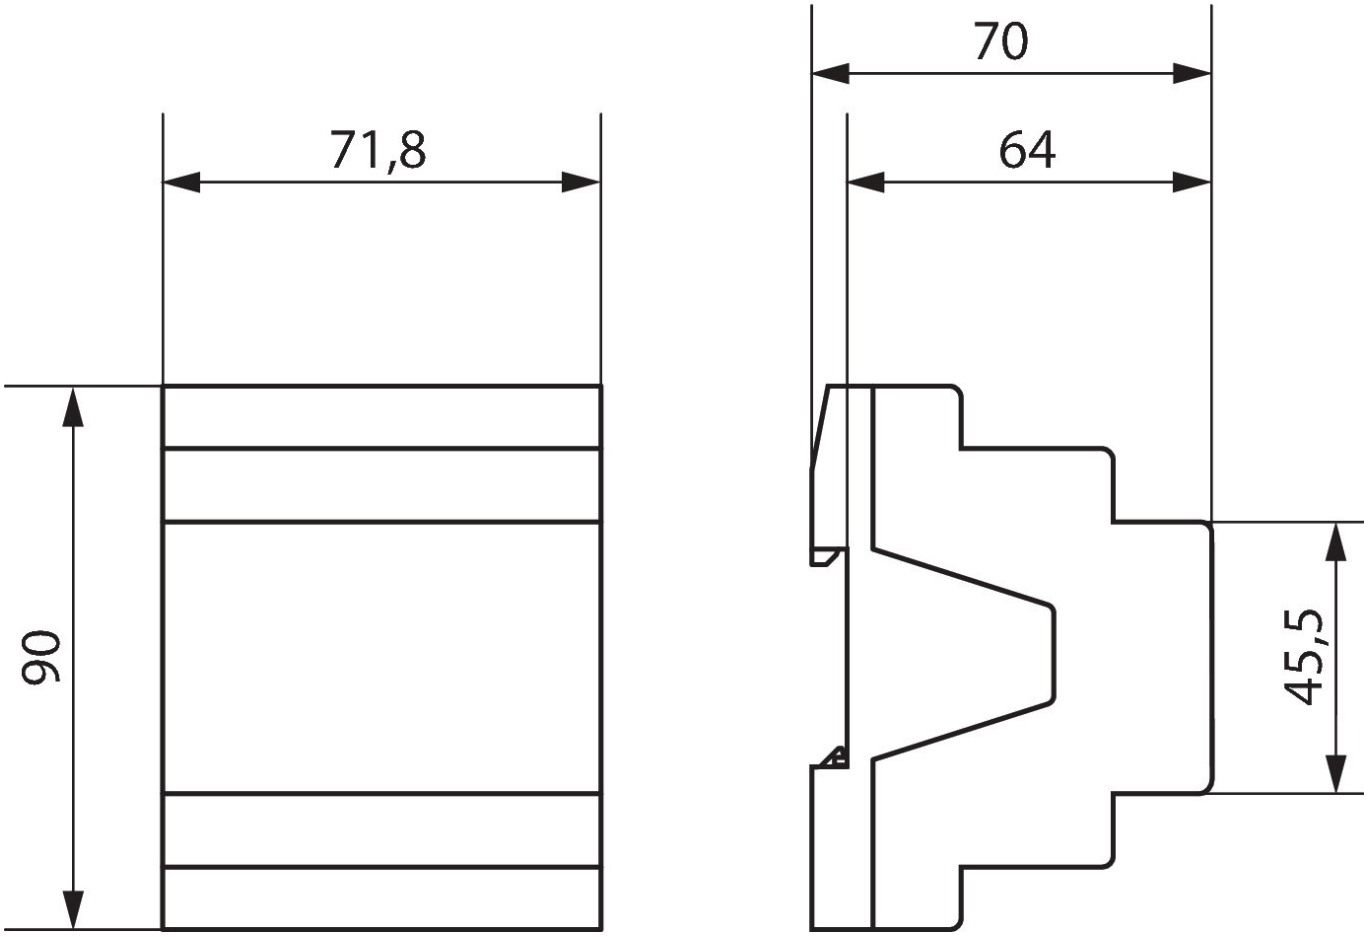
Scale Drawings