

RM 8 T KNX

Item no.: 4940200


theben

KNX

Actuators DIN rail and gateways

Description

- 8-way switching or 4-way blind actuator FIX1
- Flexible channel function selection as switching actuator or for controlling drives for blinds, shutters, sun and vision protection devices, skylights and ventilation flaps
- LED switching status display for each channel
- Manual operation on device (even without bus connection)

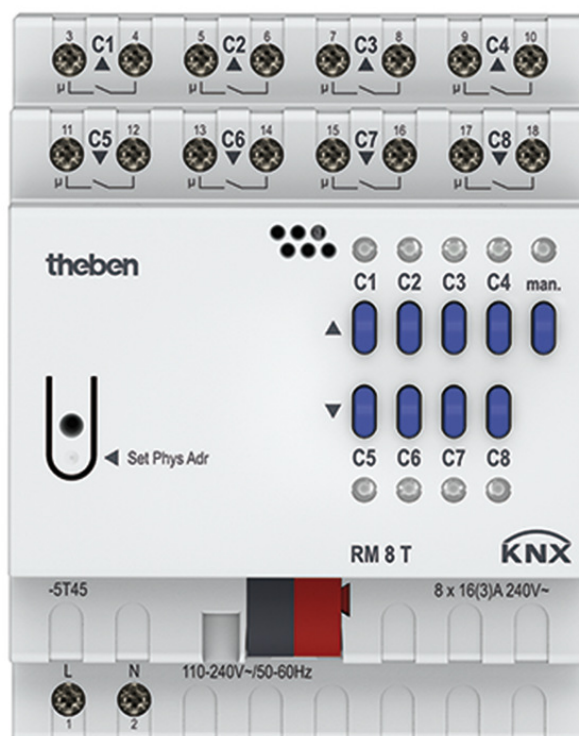

Technical data

RM 8 T KNX	
Operating voltage KNX	Bus voltage, ≤ 4 mA
Operating voltage	110 V AC - 240 V AC, 50 Hz - 60 Hz
Frequency	50 - 60 Hz
Stand-by consumption	~ 0.5 W
Installation type	DIN rail
Width	4 modules
Type of connection	Terminal screws Bus connection: KNX bus terminal
Max. cable cross section	Solid wire: 0.5 mm^2 ($\varnothing 0.8$) to 6 mm^2 Stranded wire with end sleeve: 0.5 mm^2 to 4 mm^2
Number of channels	8
Type of contact	NO contact, 16 A, 3 A
Opening width	< 3 mm

RM 8 T KNX	
Incandescent/halogen lamp load	2000 W
Fluorescent lamp load (conventional) parallel-corrected	1300 W (140 μF)
Fluorescent lamp load (conventional) not corrected	2000 VA
Fluorescent lamp load (electronic ballast)	1200 W
Energy saving lamps	300 W
LED lamp < 2 W	55 W
LED lamp 2-8 W	600 W
LED lamp > 8 W	600 W
Inrush current	max. 800 A / 200 μs
Voltage output	240 V AC
Switching output	Potential-free

Subject to technical changes and misprints

additional information at: www.theben.de/product/4940200

The load data are determined with exemplary selected illuminants and are therefore typical data due to the large number of available products.

11/08/2026

Page 1 of 3

RM 8 T KNX

Item no.: 4940200




Technical data

RM 8 T KNX	
Switching of various phases	Possible
Suitable for SELV	Yes if all channels switch at SELV
C load	–
Type	Module FIX1

RM 8 T KNX	
Ambient temperature	-5°C ... 45°C
Type of protection	IP 20
Protection class	II according to EN 60 669

Connection example

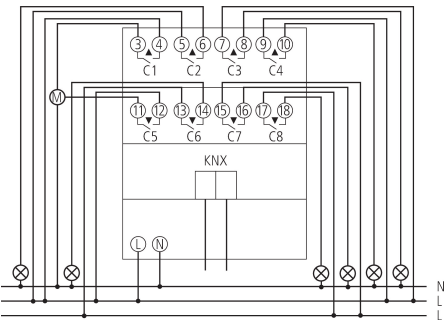


RM 8 T KNX

Item no.: 4940200

theben

Scale drawings

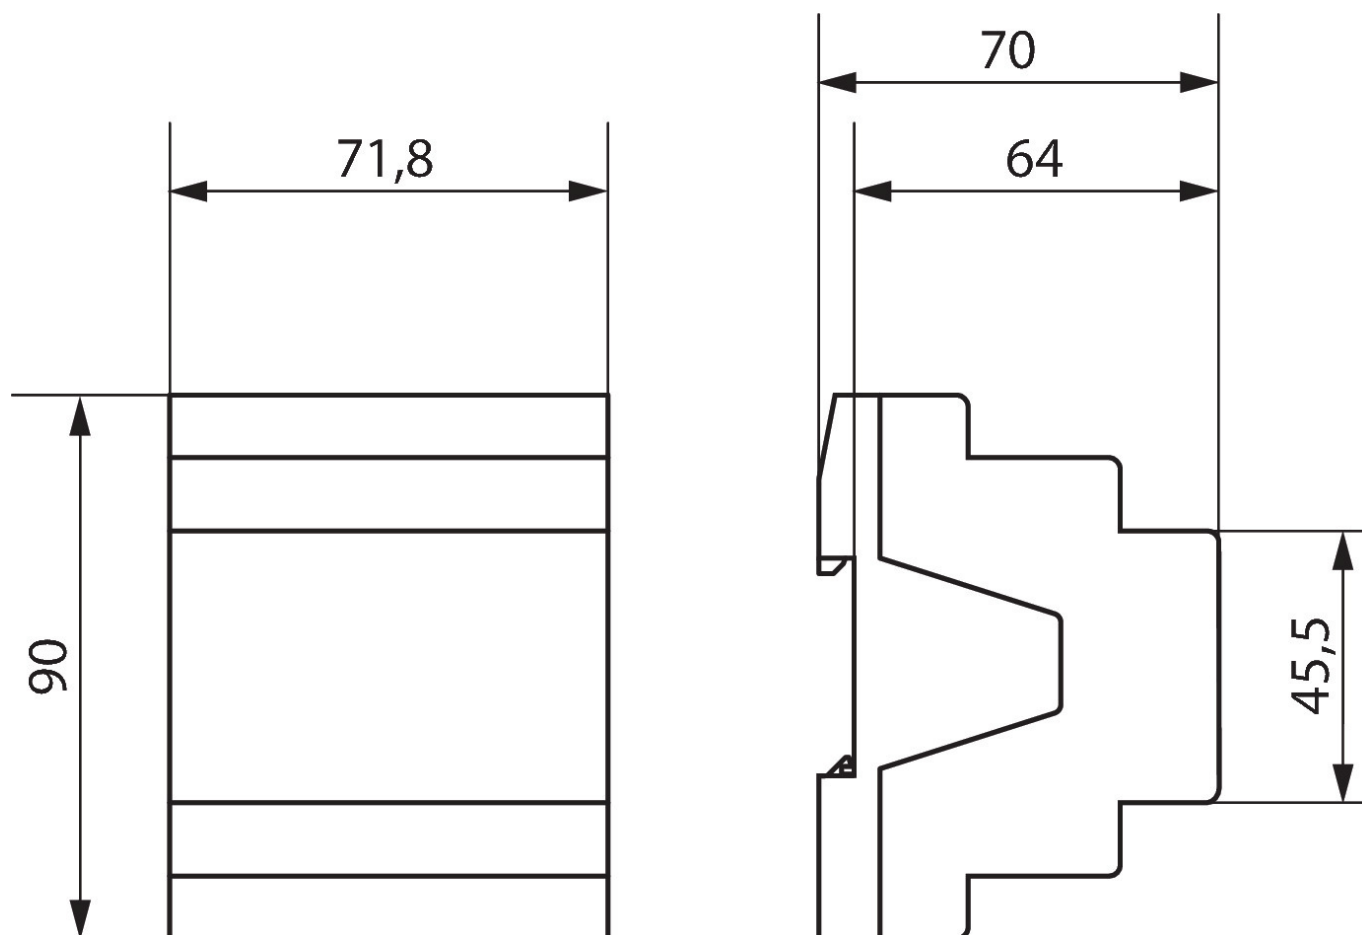

Subject to technical changes and misprints

additional information at: www.theben.de/product/4940200

The load data are determined with exemplary selected illuminants and are therefore typical data due to the large number of available products.

11/08/2026

Page 3 of 3