theMova S360-100 FLAT DE WH

Item no.: 1030540

Presence and motion detectors
Ceiling installation indoor

Description

- Passive infra-red motion detector for ceiling installation in false ceilings
- Circular detection area 360°, up to Ø 8 m (50 m²) at mounting height 3 m
- 1 channel light (Relay 230 V)
- Automatic motion and brightness-dependent control for lighting
- Daylight sensor mode for brightness-dependent control of the lighting, switchable via app
- Mixed light measurement
- Operation as fully automatic device
- Brightness switching value configurable, teach-in function
- Pulse function for staircase light time switch
- Time delay configurable
- Detection sensitivity configurable
- Test mode for checking function and detection area
- Ready for immediate use due to factory presetting (Brightness switching value 300 lux, Time delay 10 min.)
- One of these optional remote controls is required for changing the values and attitudes:
- Management remote control SendoPro
- Installation remote control theSenda P
- Optional user remote control: theSenda S





theMova S360-100 FLAT DE WH


Item no.: 1030540

Technical data

	theMova S360-100 FLAT DE WH
Operating voltage	230 V AC
Frequency	50 Hz
Installation height	2 - 4 m
Installation type	Ceiling mounting
Colour	White (similar RAL 9010)
Switching output	Light
Power consumption	~0.5 W
Light measurement	Mixed light measurement
Setting range brightness	30 - 3000 lx
Light switch-off delay	10 s - 60 min
Type of contact light	Relay 230 V/10 A µ-contact
Lamp types	Incandescent/halogen lamps, fluorescent lamps, Energy saving lamps, LEDs
Incandescent/halogen lamp load	2300 W
Compact and flourescent lamps	1150 VA (cos φ = 0,5)

	theMova S360-100 FLAT DE WH
Inrush current	max. 400 A / 200 µs
LED lamp < 2 W	25 W
LED lamp 2-8 W	250 W
LED lamp > 8 W	250 W
Type of connection	Spring terminals
Detection range	50 m² (ø 8 m)
Detection angle	360°
Cut-out	68 mm
Ambient temperature	-15°C ... 50°C
Impact resistance	IK04
Type of protection	IP 54 (when fitted)
GWP Cradle-to-Gate (A1-A3)	3.61 kg CO_2 eq
GWP Cradle-to-Grave (A1-C4)	16.78 kg CO_2 eq

Wiring Diagrams




Detection Area for planning applications at a temperature of 21 °C


Mounting height (A)	Head on to (R)	Diagonally (t)
2 m	5 m² | 2.5 m	38 m² | 7 m
2.5 m	7 m² | 3 m	38 m² | 7 m
3 m	13 m² | 4 m	50 m² | 8 m
3.5 m	13 m² | 4 m	50 m² | 8 m
4 m	13 m² | 4 m	64 m² | 9 m

theMova S360-100 FLAT DE WH


Item no.: 1030540


Detection Area for planning applications at a temperature of 21 °C

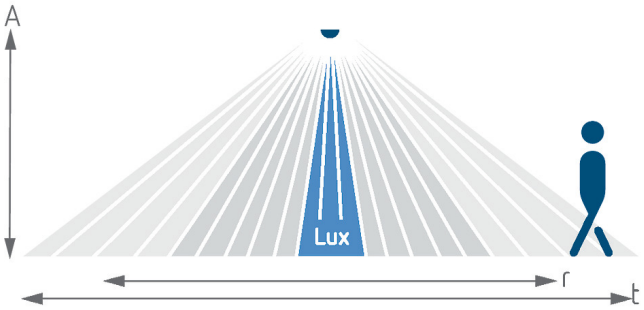

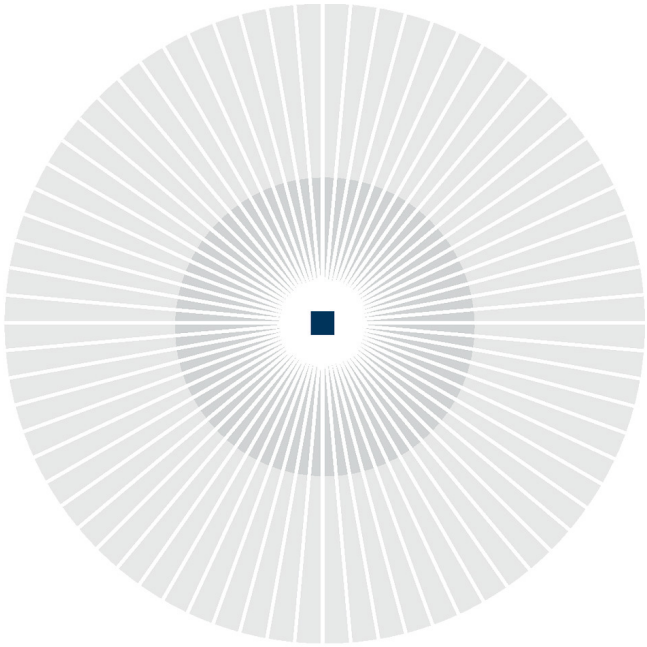

Scale Drawings

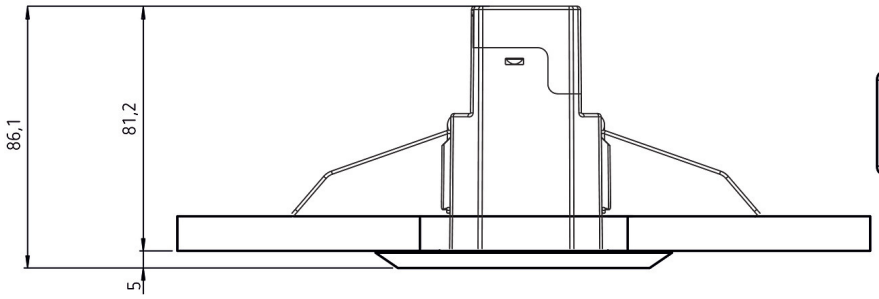

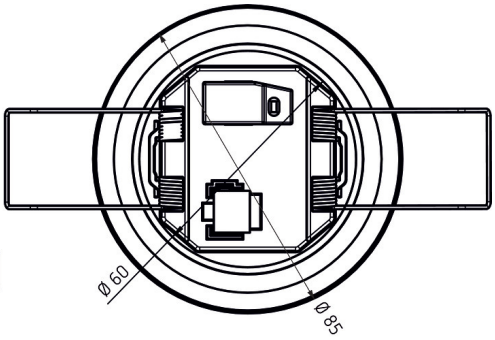

Accessories

theSenda P
Item no.: 9070910



theSenda S
Item no.: 9070911



theSenda B
Item no.: 9070985



Cover FLAT 85 GR
Item no.: 9070597



Accessories

Cover FLAT 85 BK
Item no.: 9070853



QuickSafe
Item no.: 9070531

