

theMova P360-100 UP WH

Item no.: 1030600

theben

Presence and motion detectors
Ceiling installation indoor

Description

- Passive infra-red motion detector for flush-mounted ceiling installation
- Circular detection area 360°, up to Ø 24 m (452 m²) at mounting height 3 m
- 1 channel light (Relay 230 V)
- Restriction of detection area with cover clips
- Automatic motion and brightness-dependent control for lighting
- Mixed light measurement suitable for fluorescent lamps (FL/PL/ESL), halogen/incandescent lamps and LEDs
- Operation as fully automatic device
- Brightness switching value configurable, teach-in function
- Pulse function for staircase light time switch
- Time delay configurable
- Detection sensitivity configurable
- Ready for immediate use due to factory presetting
- Test mode for checking function and detection area
- Ceiling installation in flush-mounted socket
- Surface installation possible with back box, IP 54 (option)
- User remote control theSenda S (option)
- Management remote control SendaPro (option)
- Installation remote control theSenda P (option)



Subject to technical changes and misprints

additional information at: www.theben.de/product/1030600

The load data are determined with exemplary selected illuminants and are therefore typical data due to the large number of available products.

theMova P360-100 UP WH


Item no.: 1030600



Technical data

| theMova P360-100 UP WH | | theMova P360-100 UP WH | |
|--------------------------|--|--------------------------------|------------------------------------|
| Operating voltage | 110 V AC - 230 V AC | Incandescent/halogen lamp load | 2300 W |
| Frequency | 50 - 60 Hz | Compact and fluorescent lamps | 1150 VA (cos φ = 0,5) |
| Installation height | 2 - 10 m | Inrush current | max. 800 A / 200 μs |
| Installation type | Ceiling installation, Indoor, Flush-mounted | LED lamp < 2 W | 60 W |
| Colour | White | LED lamp 2-8 W | 600 W |
| Switching output | Light | LED lamp > 8 W | 600 W |
| Power consumption | ~0.15 W | Type of connection | Screw terminals |
| Light measurement | Mixed light measurement | Max. cable cross section | max. 2 x 2,5 mm ² |
| Setting range brightness | 30 - 3000 lx | Detection range | 452 m ² (∅ 24 m 360°) |
| Light switch-off delay | 10 s - 60 min | Detection angle | 360° |
| Type of contact light | Relay 230 V / 10 A μ-contact | Ambient temperature | -15°C ... 50°C |
| Lamp types | Incandescent/halogen lamps, fluorescent lamps, Energy saving lamps, LEDs | Type of protection | IP 54 (when fitted) |

Connection example

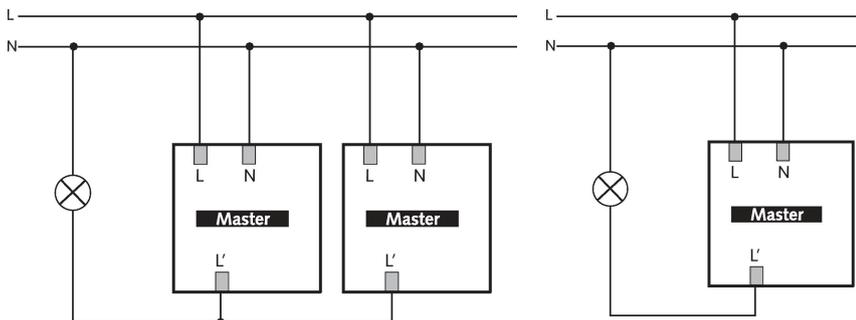

Detection range for planning applications at a temperature of 21 °C

| Mounting height (A) | Head on to (R) | Diagonally (t) |
|---------------------|-------------------------|---------------------------|
| 2 m | 28 m ² 6 m | 380 m ² 22 m |
| 2.5 m | 38 m ² 7 m | 415 m ² 23 m |
| 3 m | 50 m ² 8 m | 452 m ² 24 m |
| 3.5 m | 50 m ² 8 m | 452 m ² 24 m |
| 6 m | 50 m ² 8 m | 452 m ² 24 m |
| 10 m | 50 m ² 8 m | 491 m ² 25 m |

Subject to technical changes and misprints

additional information at: www.theben.de/product/1030600

The load data are determined with exemplary selected illuminants and are therefore typical data due to the large number of available products.

04/02/2026


Page 2 of 4

theMova P360-100 UP WH


Item no.: 1030600

theben

Detection range for planning applications at a temperature of 21 °C

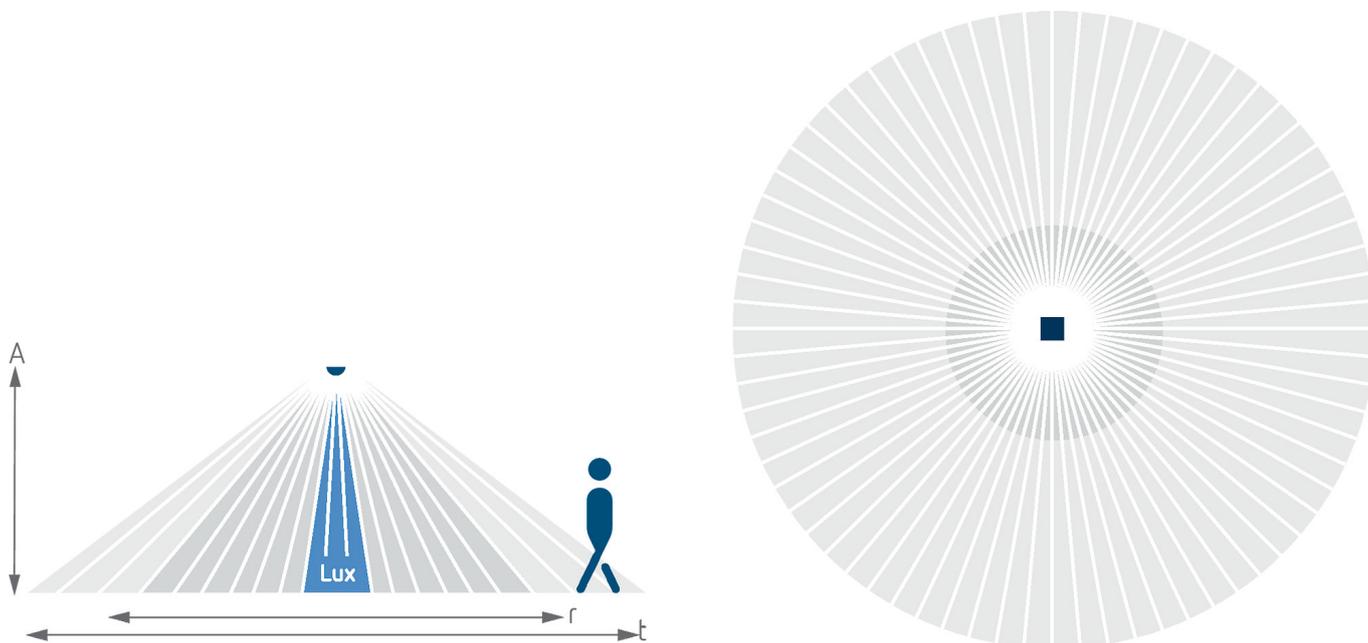

Scale drawings

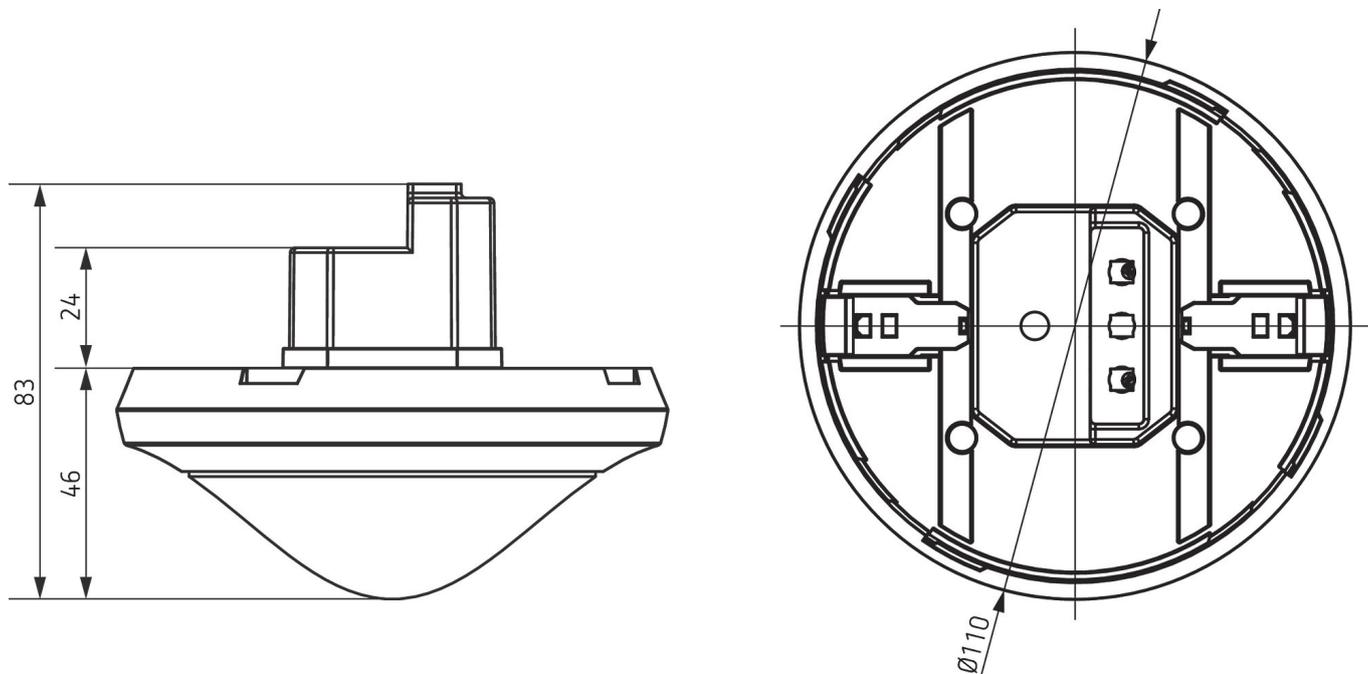

Subject to technical changes and misprints

additional information at: www.theben.de/product/1030600

The load data are determined with exemplary selected illuminants and are therefore typical data due to the large number of available products.

04/02/2026

Page 3 of 4

theMova P360-100 UP WH

Item no.: 1030600

theben

Accessories

theSenda P

Item no.: 9070910



theSenda S

Item no.: 9070911



Surface frame 110A GR

Item no.: 9070913



Ceiling installation box 73A

Item no.: 9070917

Surface frame 110A WH

Item no.: 9070912




Masking clip

Item no.: 9070921



QuickSafe

Item no.: 9070531



theSenda B

Item no.: 9070985



Cover 110 GR

Item no.: 9070591



Ceiling installation box 68A

Item no.: 9070992



Surface frame 110A BK

Item no.: 9070600



Cover 110 BK

Item no.: 9070851



Subject to technical changes and misprints

additional information at: www.theben.de/product/1030600

The load data are determined with exemplary selected illuminants and are therefore typical data due to the large number of available products.

04/02/2026

Page 4 of 4