

LUNA 121 top3 RC EL

Item no.: 1210230

theben

Time and light control Twilight switches

Description

- Twilight switch with integrated weekly timer
- External light sensor included in delivery
- 1 channel
- External input
- Time synchronisation option via connection of an external DCF or GPS antenna
- 3 special programs (small annual program)
- 84 memory locations
- Programming by app possible
- Safe transfer via optional Bluetooth Low Energy OBELISK top3
- Maximum manipulation security, time switch programs can only be transferred from the app to the device when the Bluetooth OBELISK top3 is plugged into the device
- Switching brightness digitally adjustable
- Adjustable On and Off switching delay
- Switching brightness and switching delay can be set separately for switching On and Off
- Onscreen display of channel and switching status as well as current lux value
- DuoFix spring terminals
- Zero-cross switching for relay-saving switching and high lamp loads
- Up to 4 sensors can be attached
- Up to 10 devices can be connected to a digital sensor
- Interface for OBELISK top2 memory card (PC programming)
- Extended brightness range
- Permanent switching ON/OFF
- Test function
- Switching preselection
- Display back light (can be turned off)
- PIN coding
- Operating hour counter
- ReShape: Plastic housing (upper and lower housing sections, slider) containing 93% recycled material from industrial waste (PIR - Post Industrial Recycled)



Technical data

LUNA 121 top3 RC EL	
Operating voltage	110 V AC - 230 V AC
Frequency	50 - 60 Hz
Number of channels	1
Number of memory locations	84
External inputs	1

LUNA 121 top3 RC EL	
Stand-by consumption	~0.8 W
Program	Weekly program
Additional program	Extra/Holiday program
Time basis	Quartz/DCF77
Setting range brightness	1 - 99000 lx

Subject to technical changes and misprints

additional information at: www.theben.de/product/1210230

The load data are determined with exemplary selected illuminants and are therefore typical data due to the large number of available products.

19/05/2026
Page 1 of 3

LUNA 121 top3 RC EL


Item no.: 1210230



Technical data

LUNA 121 top3 RC EL		LUNA 121 top3 RC EL	
Preset brightness value	15 lx	Fluorescent lamp load (conventional) not corrected	2600 VA
Switch-on delay	0 - 59 min	Fluorescent lamp load (conventional) parallel-corrected	130 µF
Switch-off delay	0 - 59 min	LED lamp < 2 W	50 W
Type of contact	Changeover contact	LED lamp 2-8 W	600 W
Width	2 modules	LED lamp > 8 W	600 W
Installation type	DIN rail	Inrush current	max. 800 A / 200 µs
Type of connection	DuoFix spring terminals	Housing and insulation material	High-temperature resistant, self-extinguishing thermoplastic
Display	LCD-Display	Ambient temperature	-25°C ... 55°C
Keyboards	4 touch buttons	Type of protection	IP 20
Shortest switching times	1 min	Protection class	II, Sensor III
Power reserve	10 years at 20 °C	Max. cable length to sensor	100 m
Switching capacity	16 A at 250 V AC, cos φ = 1, 10 A at 250 V AC, cos φ = 0.6		
Incandescent/halogen lamp load	2600 W		
Halogen lamp load	2600 W		

Connection example



Subject to technical changes and misprints

additional information at: www.theben.de/product/1210230


The load data are determined with exemplary selected illuminants and are therefore typical data due to the large number of available products.

LUNA 121 top3 RC EL

Item no.: 1210230

theben

Scale drawings

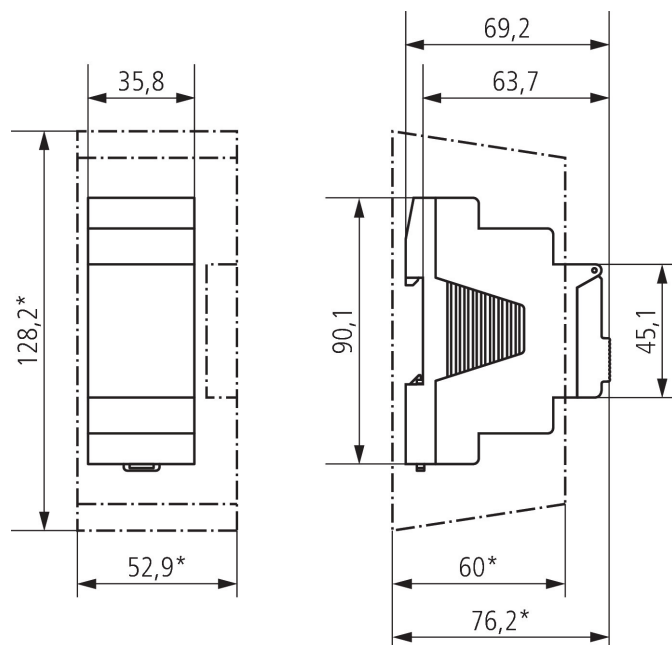

Accessories

Digital flush-mounted light sensor

Item no.: 9070456



Antenna RC-DCF

Item no.: 9070410




PC set OBELISK top2/3

Item no.: 9070409



Memory card OBELISK top2

Item no.: 9070404



Bluetooth OBELISK top3

Item no.: 9070130



Antenna RC-GNSS R

Item no.: 9070807



Antenna RC-GNSS

Item no.: 9070823



Subject to technical changes and misprints

additional information at: www.theben.de/product/1210230

The load data are determined with exemplary selected illuminants and are therefore typical data due to the large number of available products.

19/05/2026

Page 3 of 3