

SUL 184 FM WM

Item no.: 1840200

theben

Time and light control
Analogue time switches

Description

- Analogue time switch
- 1 channel
- 3 days power reserve
- Daily program
- Shortest switching time: 15 minutes
- Clock hands for time display
- Switching preselection
- Switching status display



Technical data

SUL 184 FM WM	
Operating voltage	110 - 230 V AC
Frequency	50 - 60 Hz
Number of channels	1
Installation type	Front panel installation/wall installation
Type of connection	Screw terminals
Program	Daily program
Power reserve	3 days
Switching capacity at 250 V AC, $\cos \varphi = 1$	16 A
Switching capacity at 250 V AC, $\cos \varphi = 0,6$	8 A

SUL 184 FM WM	
Shortest switching times	15 min
Programmable every	15 min
Time accuracy at 25 °C	$\leq \pm 5$ s/day (quartz)
Type of contact	Changeover contact
Stand-by consumption	0.6 W
Housing and insulation material	High-temperature resistant, self-extinguishing thermoplastic
Type of protection	IP 20
Protection class	II according to EN 60 730-1
Ambient temperature	-20°C ... 55°C

Subject to technical changes and misprints

additional information at: www.theben.de/product/1840200


The load data are determined with exemplary selected illuminants and are therefore typical data due to the large number of available products.

SUL 184 FM WM


Item no.: 1840200

theben

Connection example

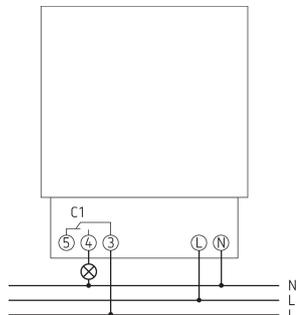

Scale drawings

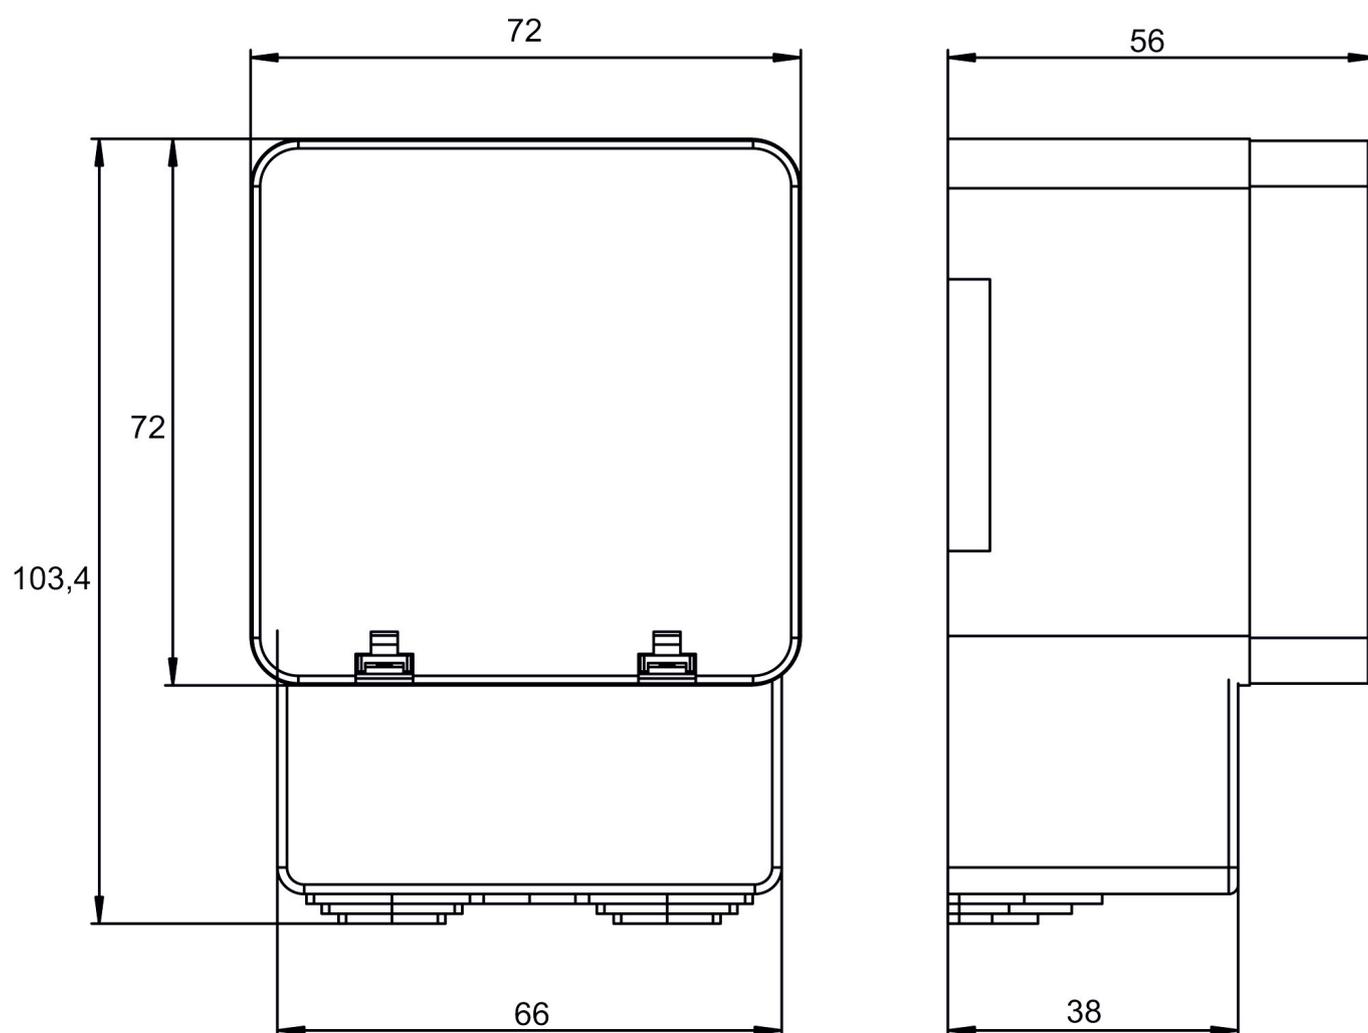

Subject to technical changes and misprints

additional information at: www.theben.de/product/1840200

The load data are determined with exemplary selected illuminants and are therefore typical data due to the large number of available products.

30/01/2026

Page 2 of 2