

thePrema P360 Slave E UP WH

Item no.: 2070130

theben

Presence and motion detectors
Ceiling installation indoor

Description

- Passive infra-red presence detector for flush-mounted ceiling installation
- Square detection area 360°
- Slave version for thePrema master presence detectors
- Ready for immediate use due to factory preset
- Test mode for checking function and detection area
- Extension of detection area via Master/Slave or Master/Master switching, a maximum of 10 detectors can be switched in parallel with each other
- Ceiling installation in flush-mounted socket
- Ceiling installation also possible with surface-mounted frame
- User remote control theSenda S, management remote control SendoPro (optional)
- * According to warranty terms and conditions, see www.theben.de/en/guarantee



5 years
guarantee*



Subject to technical changes and misprints

additional information at: www.theben.de/product/2070130

The load data are determined with exemplary selected illuminants and are therefore typical data due to the large number of available products.

thePrema P360 Slave E UP WH


Item no.: 2070130

theben

Technical data

thePrema P360 Slave E UP WH		thePrema P360 Slave E UP WH	
Operating voltage	110 - 230 ± 10 % V AC	Type of connection	Screw terminals
Frequency	50 - 60 Hz	Max. cable cross section	max. 2 x 2,5 mm²
Installation height	2 - 10 m	Size of concealed housing	55 mm
Minimum height	1.7 m	Detection range	81 m² (9 x 9 m)
Installation type	Ceiling installation, Flush-mounted	Detection angle	360°
Colour	White (similar RAL 9010)	Ambient temperature	0°C ... 50°C
Switching output	Slave	Type of protection	IP 40 (when fitted)
Power consumption	~0.1 W	GWP Cradle-to-Gate (A1-A3)	4.98 kg CO ₂ eq
Light measurement	Mixed light measurement	GWP Cradle-to-Grave (A1-C4)	8.58 kg CO ₂ eq
Lamp types	Incandescent/halogen lamps, fluorescent lamps, Energy saving lamps, LEDs		

Connection example

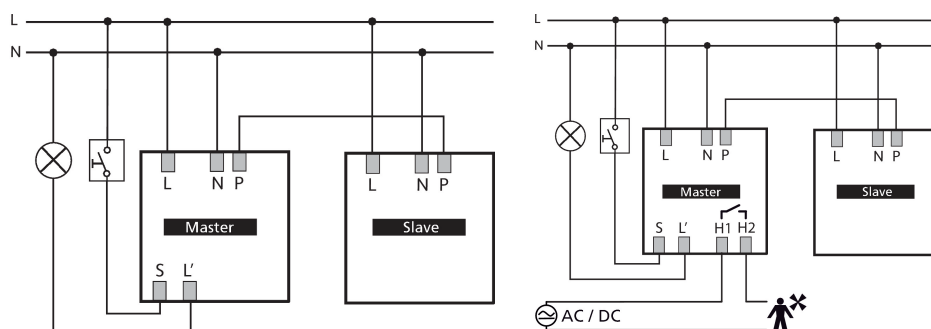

Detection range for planning applications at a temperature of 21 °C

Mounting height (A)	Sitting (S)	Walking (T)
2 m	20 m² 4.5 m x 4.5 m	36 m² 6 m x 6 m ± 0.5 m
2.5 m	36 m² 6 m x 6 m	64 m² 8 m x 8 m
3 m	49 m² 7 m x 7 m, 81 m² 9 m x 9 m ± 1 m	81 m² 9 m x 9 m ± 0.5 m
3.5 m	64 m² 8 m x 8 m	100 m² 10 m x 10 m ± 1 m
5 m		144 m² 12 m x 12 m ± 1.5 m
10 m		400 m² 20 m x 20 m ± 2 m

Subject to technical changes and misprints

additional information at: www.theben.de/product/2070130

The load data are determined with exemplary selected illuminants and are therefore typical data due to the large number of available products.

06/08/2026


Page 2 of 4

thePrema P360 Slave E UP WH

Item no.: 2070130




Detection range for planning applications at a temperature of 21 °C

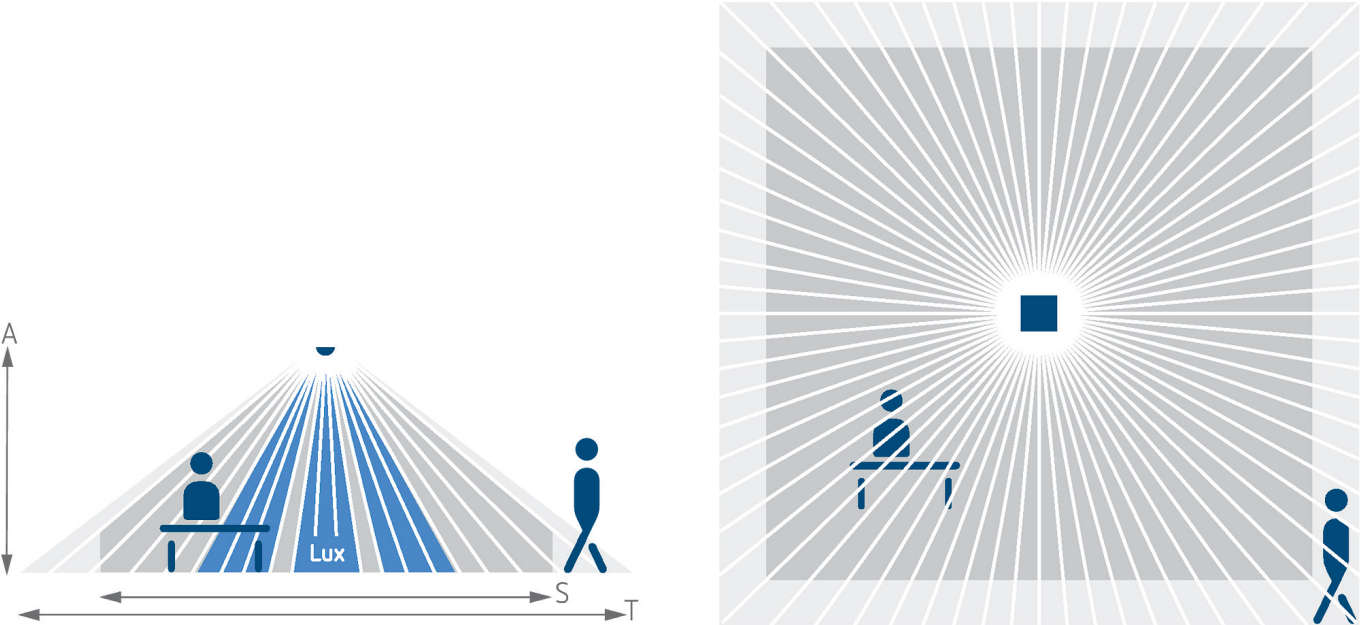

Detection range according to Sensnorm IEC 63180

Mounting height (A)	Diagonally (T)	Head on to (R)	Sitting (S)
2.5 µm	77 m² 8.8 m x 8.8 m	64 m² 8 m x 8 m	42 m² 6.5 m x 6.5 m

Scale drawings

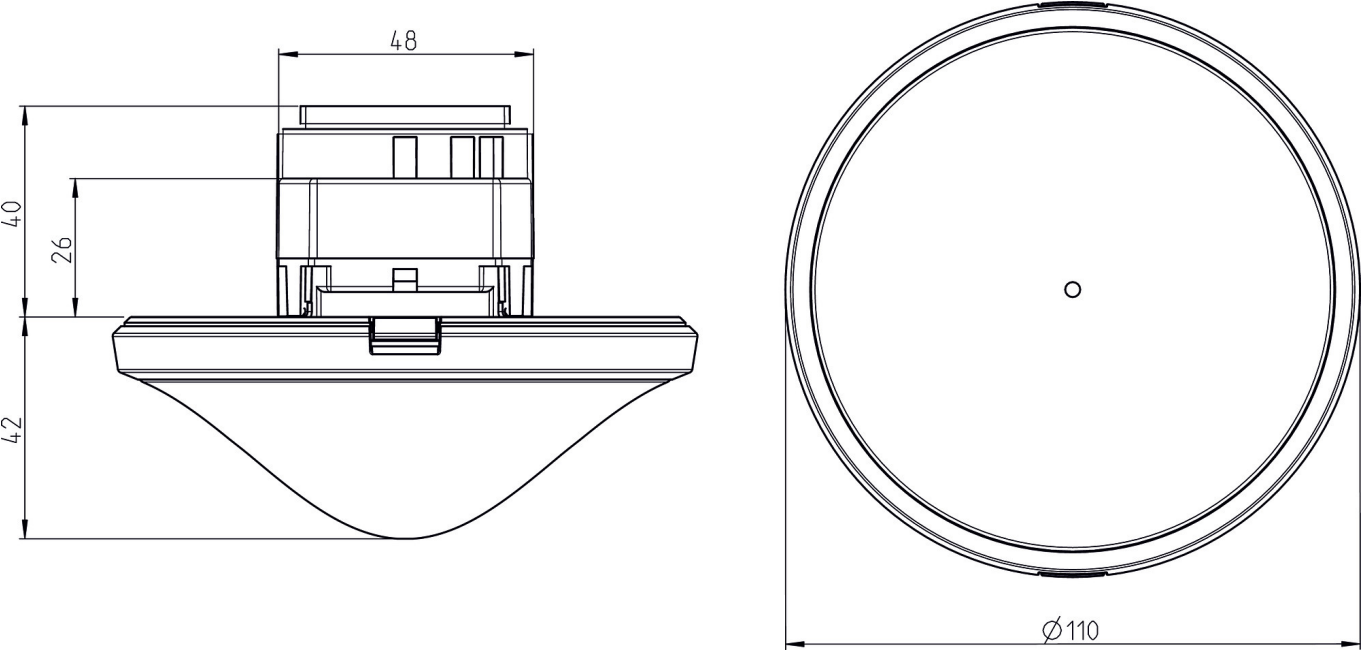

Subject to technical changes and misprints
 additional information at: www.theben.de/product/2070130
 The load data are determined with exemplary selected illuminants and are therefore typical data due to the large number of available products.

thePrema P360 Slave E UP WH

Item no.: 2070130

theben

Accessories

theSenda P

Item no.: 9070910




Ceiling installation box 73A

Item no.: 9070917


Surface frame 110A WH

Item no.: 9070912



QuickSafe

Item no.: 9070531



theSenda B

Item no.: 9070985



Ceiling installation box 68A

Item no.: 9070992



Surface frame 110A BK

Item no.: 9070600



Subject to technical changes and misprints

additional information at: www.theben.de/product/2070130

The load data are determined with exemplary selected illuminants and are therefore typical data due to the large number of available products.

06/08/2026

Page 4 of 4