

theRonda S360-100 DE WH

Item no.: 2080560

theben

Presence and motion detectors
Ceiling installation indoor

Description

- Passive infra-red presence detector for ceiling installation
- Circular detection area 360°, up to Ø 8 m (50 m²) at mounting height 3 m
- 1 channel light (Relay, 230 V)
- Automatic motion and brightness-dependent control for lighting
- Mixed light measurement suitable for fluorescent lamps (FL/PL/ESL), halogen/incandescent lamps and LEDs
- Operation as fully automatic device
- Brightness switching value configurable, teach-in function
- Pulse function for staircase light time switch
- Time delay configurable
- Detection sensitivity configurable
- Test mode for checking function and detection area
- Ready for immediate use due to factory presetting (Brightness switching value 300 lux, Time delay 10 min.)
- One of these optional remote controls is required for changing the values and attitudes:
 - Management remote control SendaPro
 - Installation remote control theSenda P
 - Optional user remote control: theSenda S



Technical data

| theRonda S360-100 DE WH | |
|--------------------------|-------------------------|
| Operating voltage | 230 V AC |
| Frequency | 50 Hz |
| Installation height | 2 - 4 m |
| Minimum height | 1.7 m |
| Installation type | Ceiling mounting |
| Colour | White |
| Switching output | Light |
| Light measurement | Mixed light measurement |
| Setting range brightness | 30 - 3000 lx |
| Light switch-off delay | 10 s - 60 min |

| theRonda S360-100 DE WH | |
|--------------------------------|--|
| Lamp types | Incandescent/halogen lamps, fluorescent lamps, Energy saving lamps, LEDs |
| Incandescent/halogen lamp load | 2300 W |
| Inrush current | max. 400 A / 200 µs |
| LED lamp < 2 W | 25 W |
| LED lamp 2-8 W | 250 W |
| LED lamp > 8 W | 250 W |
| Type of connection | Screw terminals |
| Max. cable cross section | max. 2 x 2,5 mm² |

Subject to technical changes and misprints

additional information at: www.theben.de/product/2080560

The load data are determined with exemplary selected illuminants and are therefore typical data due to the large number of available products.

27/05/2026
Page 1 of 3

theRonda S360-100 DE WH


Item no.: 2080560



Technical data


| theRonda S360-100 DE WH | | theRonda S360-100 DE WH | |
|-------------------------|---------------------------|-------------------------|---------------------|
| Detection range | 50 m ² (ø 8 m) | Impact resistance | IK04 |
| Detection angle | 360° | Type of protection | IP 54 (when fitted) |
| Ambient temperature | -15°C ... 50°C | | |

Connection example

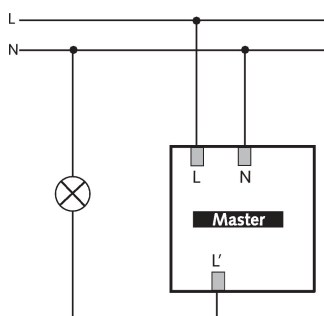

Detection range for planning applications at a temperature of 21 °C

| Mounting height (A) | Sitting (S) | Diagonally (T) | Head on to (R) |
|---------------------|--------------------------|-------------------------|--------------------------|
| 2 m | 5 m ² 2.5 m | 38 m ² 7 m | 5 m ² 2.5 m |
| 2.5 m | 7 m ² 3 m | 38 m ² 7 m | 7 m ² 3 m |
| 3 m | 13 m ² 4 m | 50 m ² 8 m | 13 m ² 4 m |
| 3.5 m | 13 m ² 4 m | 50 m ² 8 m | 13 m ² 4 m |
| 4 m | 13 m ² 4 m | 64 m ² 9 m | 13 m ² 4 m |

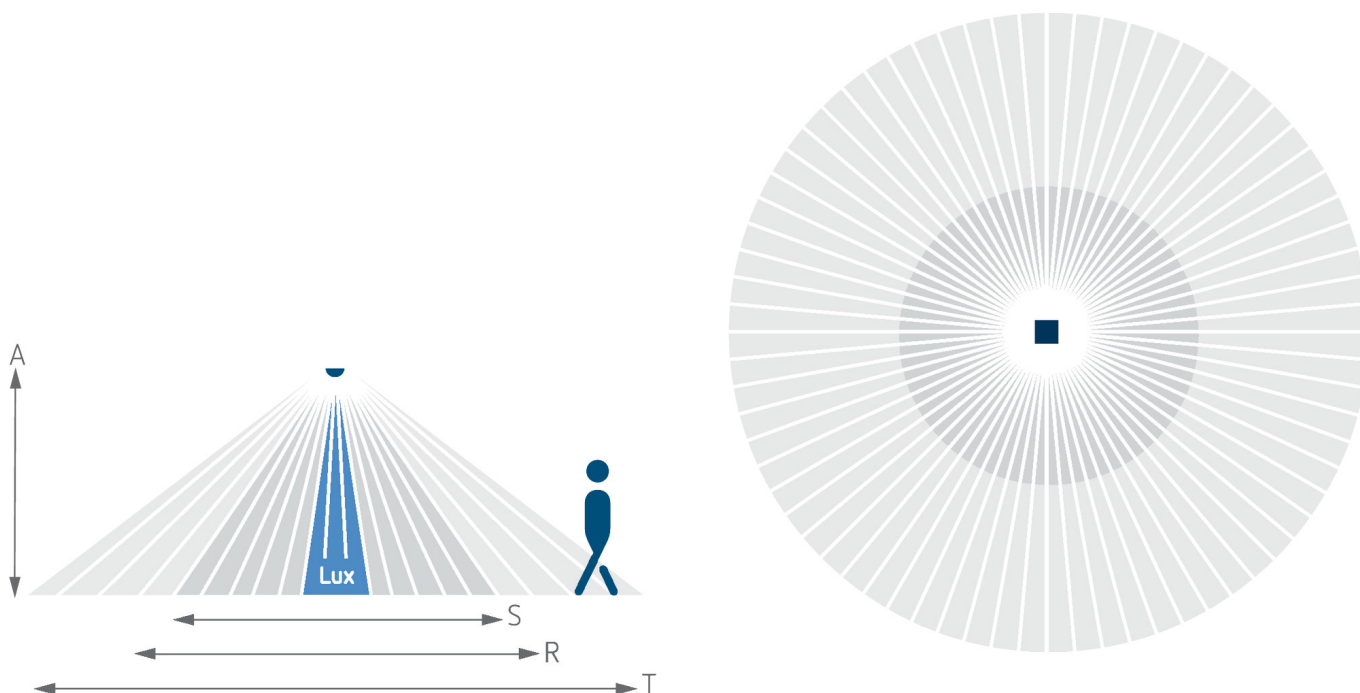

Subject to technical changes and misprints

additional information at: www.theben.de/product/2080560

The load data are determined with exemplary selected illuminants and are therefore typical data due to the large number of available products.

theRonda S360-100 DE WH


Item no.: 2080560



Detection range according to Sensnorm IEC 63180

| Mounting height (A) | Diagonally (T) | Head on to (R) | Sitting (S) |
|---------------------|--------------------------|--------------------------|-------------------------|
| 2.5 m | 28 m ² 6 m | 28 m ² 6 m | 20 m ² 5 m |
| 4 m | 95 m ² 11 m | 79 m ² 10 m | |

Scale drawings

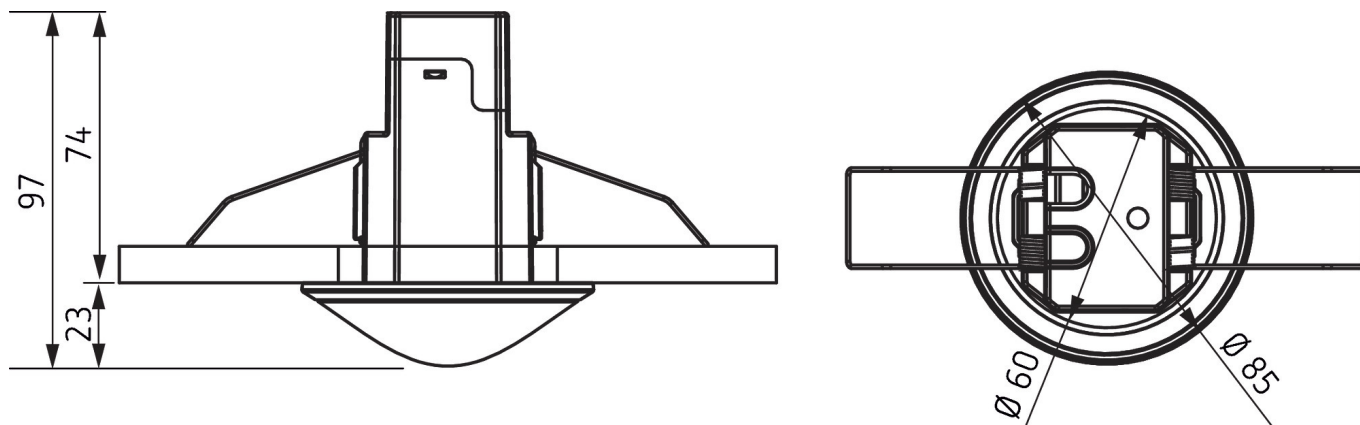

Accessories

theSenda P
Item no.: 9070910



theSenda S
Item no.: 9070911



theSenda B
Item no.: 9070985




Cover 85 GR
Item no.: 9070594



Cover 85 BK
Item no.: 9070852



QuickSafe
Item no.: 9070531



Subject to technical changes and misprints

additional information at: www.theben.de/product/2080560

The load data are determined with exemplary selected illuminants and are therefore typical data due to the large number of available products.