theRonda S360 KNX AP BK

Item no.: 2089552

Presence and motion detectors
Ceiling installation indoor

Description

- Passive infra-red presence detector KNX for ceiling installation
- Circular detection area 360°,Ø 8 m, (50 m²) at mounting height 3 m
- 2 channels light and 2 channels presence
- Mixed light measurement
- 2 light channels C1, C2
- Switching operation or constant light control with standby function (orientation light)
- Switching mode with dimmable lighting
- Choice of fully or semi-automatic
- Brightness switching value or set point value can be set in lux by using parameters, the object or via remote control
- Teach-in of the brightness switching value or the set point value
- Reduction of time delay when present briefly (short-term presence)
- Manual override by telegram or remote control
- 2 presence channels C4, C5, individually configurable
- Switch-on delay and time delay configurable
- Setting the room correction factor for brightness measurement comparison
- Adjustable sensitivity
- Test mode for checking function and detection area
- Scenes
- Parallel switching of multiple presence detectors (Master/Slave or Master/Master)
- User remote control «theSenda S» (option)
- Management remote control «SendoPro 868-A» (option)
- Installation remote control «theSenda P» (option)



Technical data

	theRonda S360 KNX AP BK
Installation height	2 - 4 m
Minimum height	1.7 m

	theRonda S360 KNX AP BK
Detection angle	360°
Type of connection	KNX bus terminal

theRonda S360 KNX AP BK

Item no.: 2089552


Technical data


	theRonda S360 KNX AP BK
Installation type	Ceiling installation, Surface mounted
Light switch-off delay	30 s - 60 min
Lamp types	Energy saving lamps, fluorescent lamps, Incandescent/halogen lamps, LEDs
Light measurement	Mixed light measurement
Presence switch-off delay	10 s - 120 min

	theRonda S360 KNX AP BK
Switch-on delay presence	10 s - 30 min / inactive
Ambient temperature	-15°C ... 50°C
Detection range	50 m² (ø 8 m)
Colour	Black (similar RAL 9005)
Type of protection	IP 54
GWP Cradle-to-Gate (A1-A3)	4.11 kg CO_2 eq
GWP Cradle-to-Grave (A1-C4)	14.08 kg CO_2 eq

Detection Area for planning applications at a temperature of 21 °C

Mounting height (A)	Sitting (S)	Diagonally (T)	Head on to (R)
2 m	5 m² | 2.5 m	38 m² | 7 m	5 m² | 2.5 m
2.5 m	7 m² | 3 m	38 m² | 7 m	7 m² | 3 m
3 m	13 m² | 4 m	50 m² | 8 m	13 m² | 4 m
3.5 m	13 m² | 4 m	50 m² | 8 m	13 m² | 4 m
4 m	13 m² | 4 m	64 m² | 9 m	13 m² | 4 m

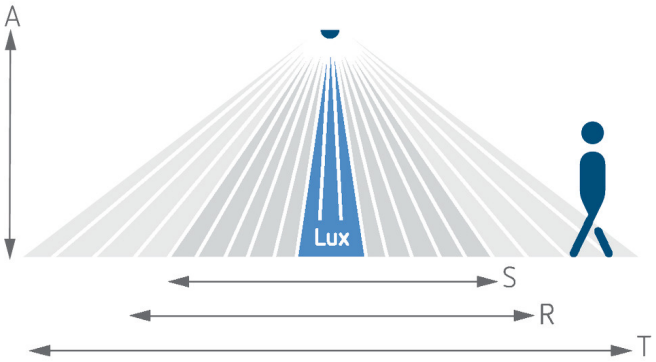


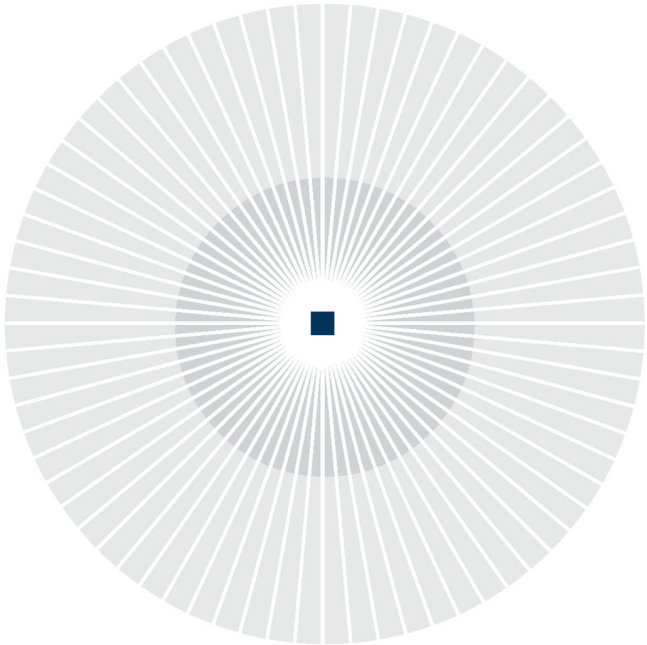


theRonda S360 KNX AP BK

Item no.: 2089552

Scale Drawings

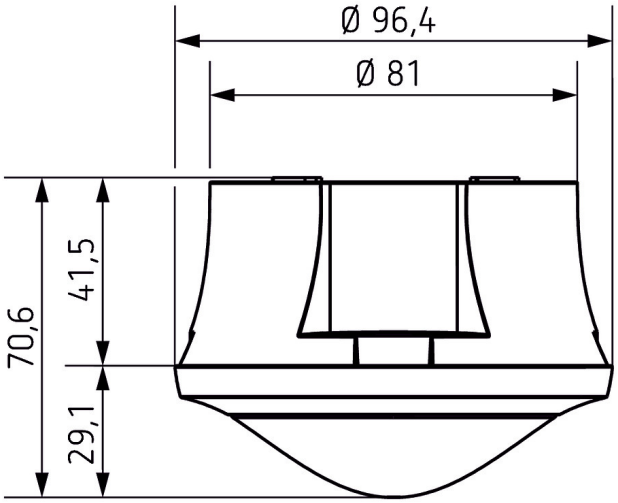

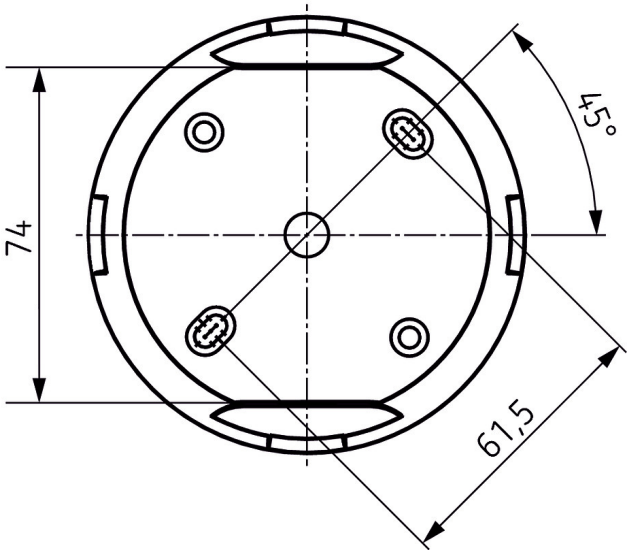

Accessories

theSenda P
Item no.: 9070910




theSenda S
Item no.: 9070911



theSenda B
Item no.: 9070985



QuickSafe
Item no.: 9070531



QuickSafe
Item no.: 9070531

