

OKTO ES12-230


Item no.: 3120130

theben

Time and light control
Latching relay

Description

- Electronical latching relay with 1 channel/contact (normally open contact)
- Comfortable lighting control of one common consumer with several push-buttons possible
- Particularly quiet operation of the installation switch
- High glow lamp load up to 100 mA
- Automatic 3-/4-wire detection of the pulse switch
- Lamps-friendly due to zero-crossing switching for high LED loads (up to 600 W)
- Stand-by consumption of only 0.3 W

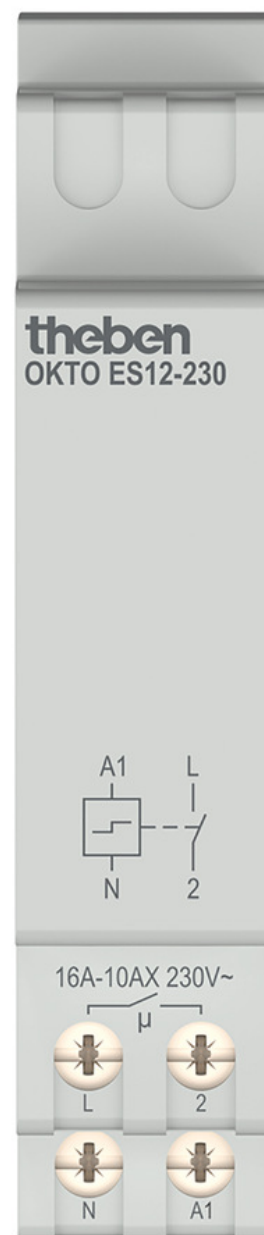

Subject to technical changes and misprints

additional information at: www.theben.de/product/3120130

The load data are determined with exemplary selected illuminants and are therefore typical data due to the large number of available products.

OKTO ES12-230

Item no.: 3120130




Technical data

OKTO ES12-230	
Operating voltage	230 V AC
Frequency	50 - 60 Hz
Width	1 modules
Installation type	DIN rail
Stand-by consumption	~0.3 W
Glow lamp load	100 mA
Type of contact	NO contact
Incandescent/halogen lamp load	2600 W
LED lamp < 2 W	55 W
LED lamp 2-8 W	600 W

OKTO ES12-230	
LED lamp > 8 W	600 W
Switching capacity	16 A at 230 V AC, $\cos \varphi = 1$
Inrush current	max. 800 A / 200 μ s
Zero-cross switching	✓
Housing and insulation material	High-temperature resistant, self-extinguishing thermoplastic
Ambient temperature	-25°C ... 50°C
Protection class	II
Type of protection	IP 20

Connection example

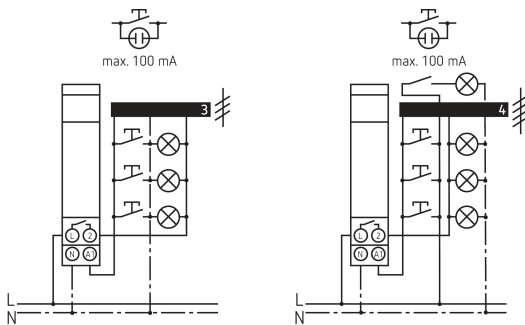

Subject to technical changes and misprints

additional information at: www.theben.de/product/3120130

The load data are determined with exemplary selected illuminants and are therefore typical data due to the large number of available products.

30/03/2026

Page 2 of 2