

LUXORliving BI360 WH

Item no.: 4800355

theben

Smart Home

Push buttons / Motion detectors

Description

- Motion detector (PIR) for ceiling mounting indoors
- 360° circular detection area, Ø 12 m (113 m²) at 3 m mounting height
- Mixed light measurement suitable for fluorescent lamps (FL/PL/ESL), halogen/incandescent lamps and LEDs
- Integrated temperature sensor
- Extension of the detection range through parallel connection
- Adjustable sensitivity
- Download of the installation software LUXORplug at <https://luxorliving.de/luxorplug>



Technical data

LUXORliving BI360 WH	
Installation height	2 - 4 m
Detection angle	360°
Type of connection	KNX bus terminal
Installation type	Ceiling installation, Flush-mounted
Lamp types	Incandescent/halogen lamps, fluorescent lamps, Energy saving lamps, LEDs

LUXORliving BI360 WH	
Light measurement	Mixed light measurement
Detection range	113 m² (Ø 12 m)
Colour	White
Protection class	III
Type of protection	IP 54 (when fitted)

Detection range for planning applications at a temperature of 21 °C

Montagehöhe (A)	Sitzend (S)	Quer gehend (T)	Frontal gehend (R)
2,5 m	13 m² 4 m	78 m² 10 m	28 m² 6 m
3 m	20 m² 5 m	113 m² 12 m	28 m² 6 m
3,5 m	20 m² 5 m	78 m² 10 m	28 m² 6 m

Subject to technical changes and misprints

additional information at: www.theben.de/product/4800355

The load data are determined with exemplary selected illuminants and are therefore typical data due to the large number of available products.

27/05/2026


Page 1 of 2

LUXORliving BI360 WH


Item no.: 4800355

theben

Detection range for planning applications at a temperature of 21 °C

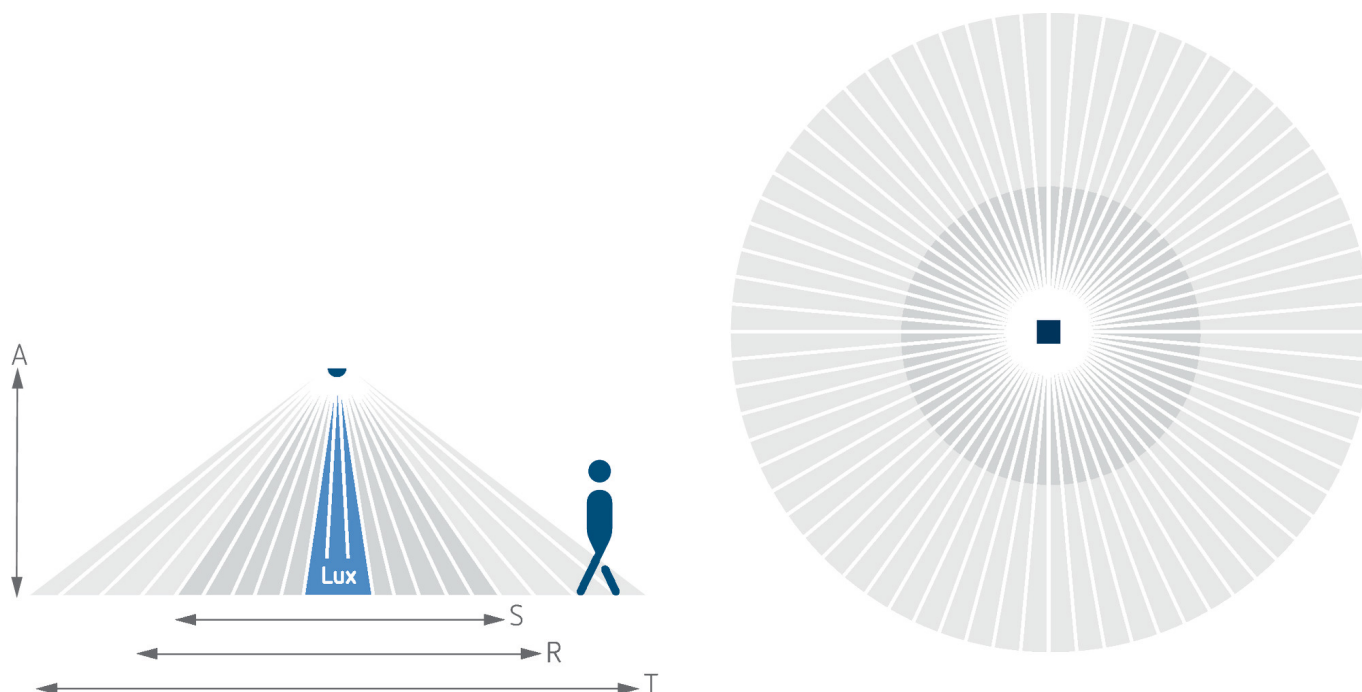

Scale drawings

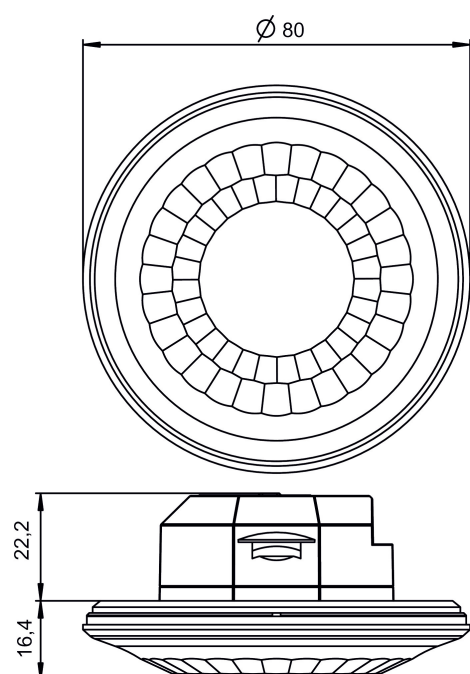

Subject to technical changes and misprints

additional information at: www.theben.de/product/4800355

The load data are determined with exemplary selected illuminants and are therefore typical data due to the large number of available products.

27/05/2026

Page 2 of 2