

LUXORliving T4.1


Item no.: 4800405



Smart Home
Binary inputs

Description

- 4-way binary input sensor interface LUXORliving
- 6-pole cable connection
- Can be installed in flush-mounted sockets with conventional sensors / switches
- Software functions: Switch / push-button, dimming, blinds
- Colour coding of wiring pairs
- Download of the installation software LUXORplug at <https://luxorliving.de/luxorplug>

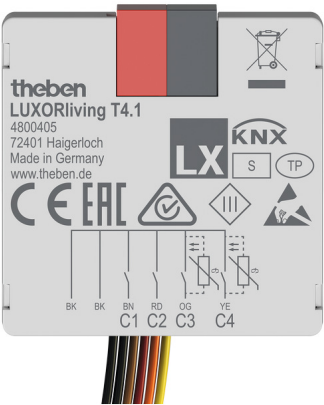

Technical data

LUXORliving T4.1	
Operating voltage KNX	Busspannung, ≤10 mA
Installation type	in flush-mounted socket
Number of inputs	4
Max. cable length	30 m
Length connecting wires	25 cm

LUXORliving T4.1	
Contact current	0.5 mA
Type of protection	IP 20
Protection class	III

Connection example

Subject to technical changes and misprints

additional information at: www.theben.de/product/4800405


The load data are determined with exemplary selected illuminants and are therefore typical data due to the large number of available products.

LUXORliving T4.1

Item no.: 4800405

theben

Scale drawings

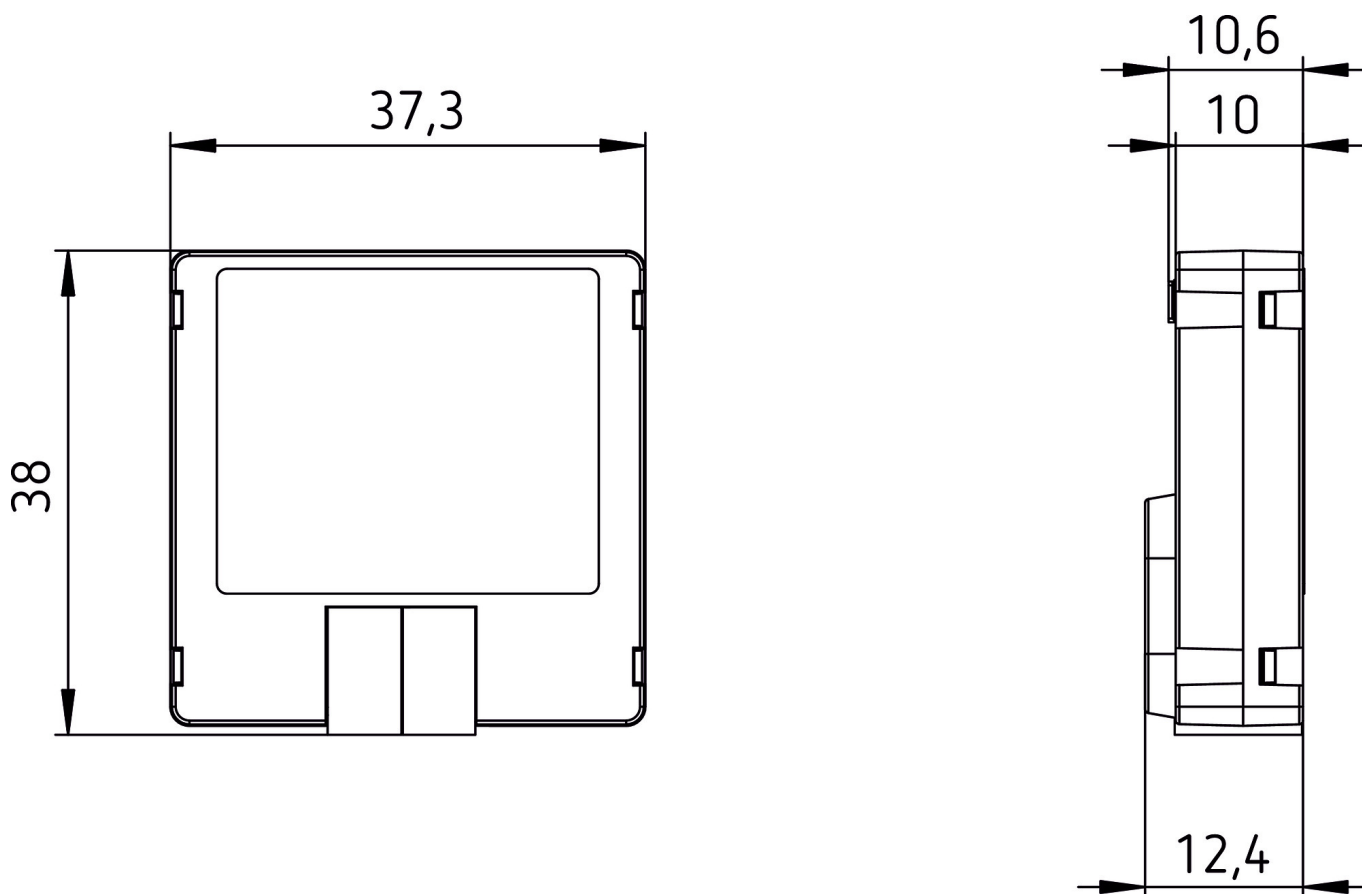

Accessories

Flush-mounted temperature sensor

Item no.: 9070496




Temperature sensor

Item no.: 9070321



Temperature sensor RAMSES IP 65

Item no.: 9070459



Subject to technical changes and misprints

additional information at: www.theben.de/product/4800405

The load data are determined with exemplary selected illuminants and are therefore typical data due to the large number of available products.