LUXORliving J4

Item no.: 4800450

Smart Home
Actuators DIN rail and gateways

Description

- 4-way blind actuator LUXORliving
- For controlling drives for blinds, shutters, sun and vision protection devices
- Manual operation on device
- LED Up and Down switching status display for each channel
- Download of the installation software LUXORplug at https://luxorliving.de/luxorplug

Technical data

	LUXORliving J4
Operating voltage KNX	<10 mA
Operating voltage	110 - 240 V AC
Stand-by consumption	<0.3 W
Number of channels	4
Width	4 modules
Installation type	DIN rail

	LUXORliving J4
Output	NO contact, 6 A
Switching output	Potential-free, for SELV, if the whole device switches SELV
Type of protection	IP 20
Protection class	II according to EN 60 669

Wiring Diagrams


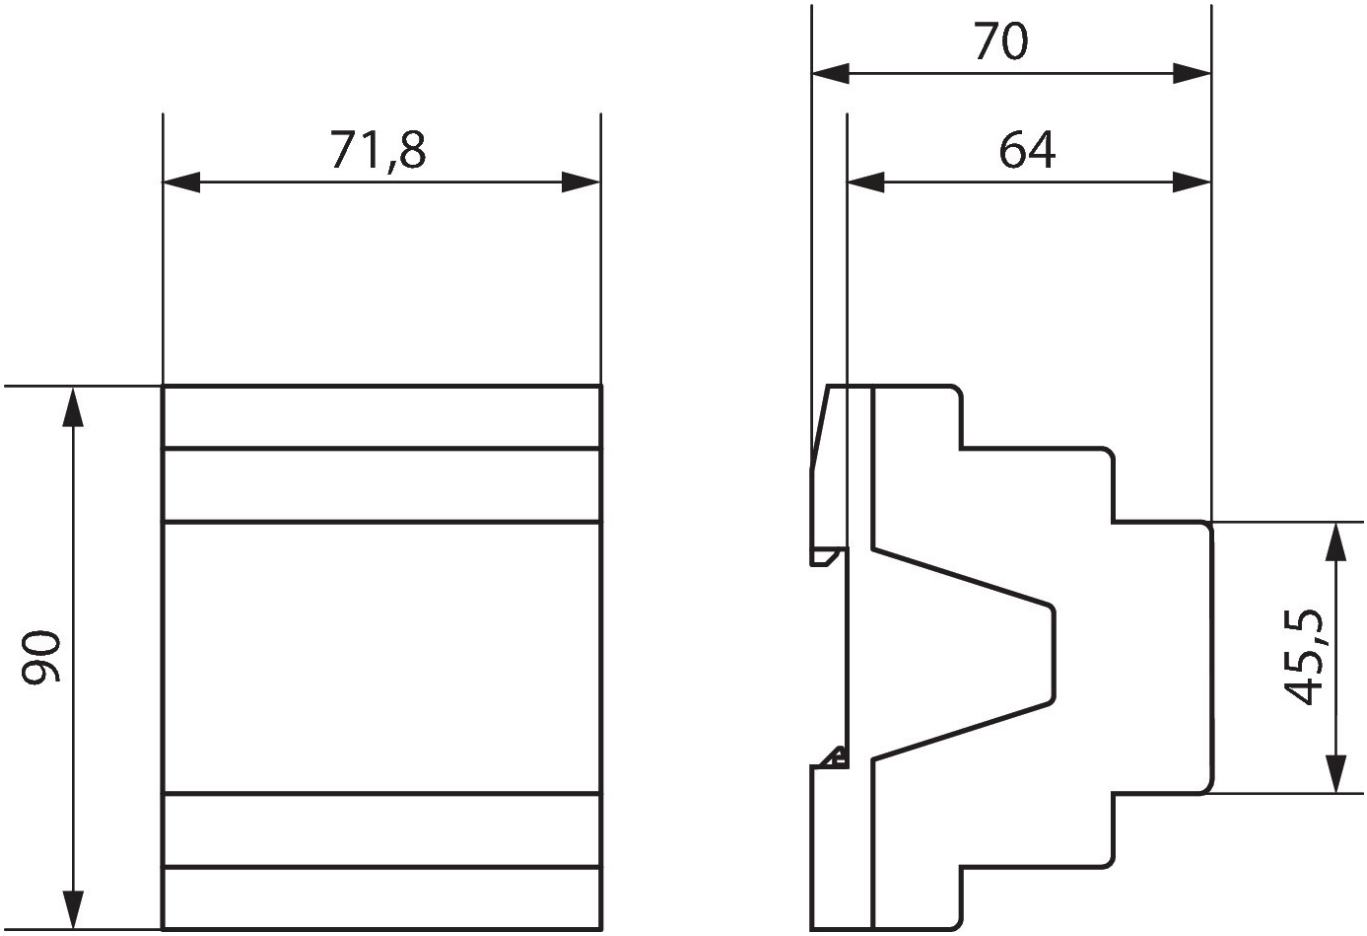
Scale Drawings