LUXORliving R718

Item no.: 4800480

Smart Home
HVAC controller

Description

- Individual room thermostat LUXORliving
- Setting range 5 - 30°C
- Applications: heating via radiator or underfloor heating, heating and cooling e.g. radiator or cooling ceiling
- Integrated 4-way binary input sensor interface
- Download of the installation software LUXORplug at https://luxorliving.de/luxorplug



Technical data

	LUXORliving R718
Operating voltage KNX	Bus voltage, <12 mA
Installation type	Surface-mounted
Display	6 LEDs
Interface extension max.	30 m
Ambient temperature	5°C ... 40°C
Measuring range temperature	-5°C ... 45°C

	LUXORliving R718
Setting range temperature	5°C ... 30°C
Contact voltage	5 V Internal provided
Contact current	0.5 mA
Type of protection	IP 20
Protection class	III according to EN 60 730-1

Wiring Diagrams

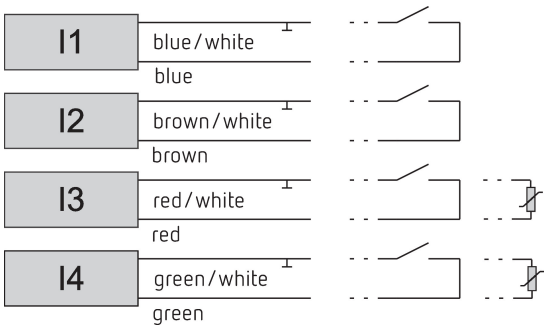

LUXORliving R718

Item no.: 4800480

Scale Drawings

