
LUXORliving H1 S RF

Item no.: 4800641

Smart Home
HVAC controller

Description

- 1-way wireless flush-mounted heating actuator LUXORliving
- Noiseless control of thermal actuators 230 V AC
- Integrated temperature controller heating/cooling
- Valve protection function
- Encrypted wireless communication
- Easy installation due to the compact housing
- 2 binary inputs for floating contacts such as buttons, switches, temperature sensor (I2)
- Integrated temperature monitoring for increased operating safety, e.g. in the event of overload
- Download of the installation software LUXORplug at https://luxorliving.de/luxorplug

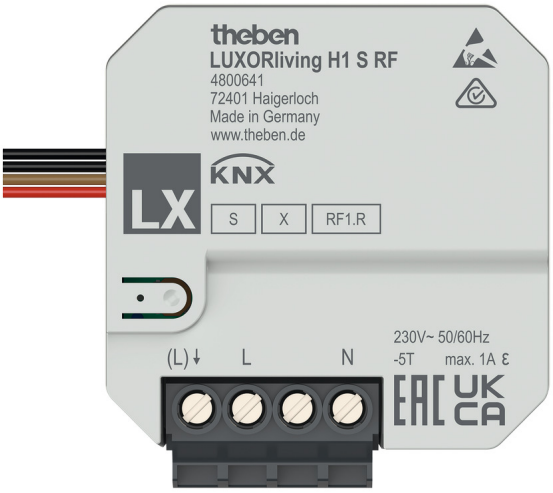


Technical data


	LUXORliving H1 S RF
Operating voltage	230 V AC, 50 Hz - 60 Hz
Frequency	50 - 60 Hz
Stand-by consumption	~0.4 W
Installation type	Flush-mounted
Number of channels	1
Type of contact	1 A

	LUXORliving H1 S RF
Ambient temperature	-5°C ... 45°C
Protection class	II
Predeccessor	4800640, LUXORliving H1 RF, 4800640, LUXORliving H1 RF

Wiring Diagrams

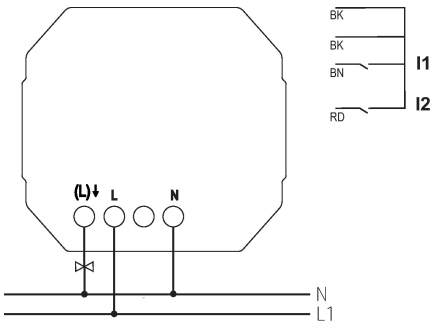

Scale Drawings

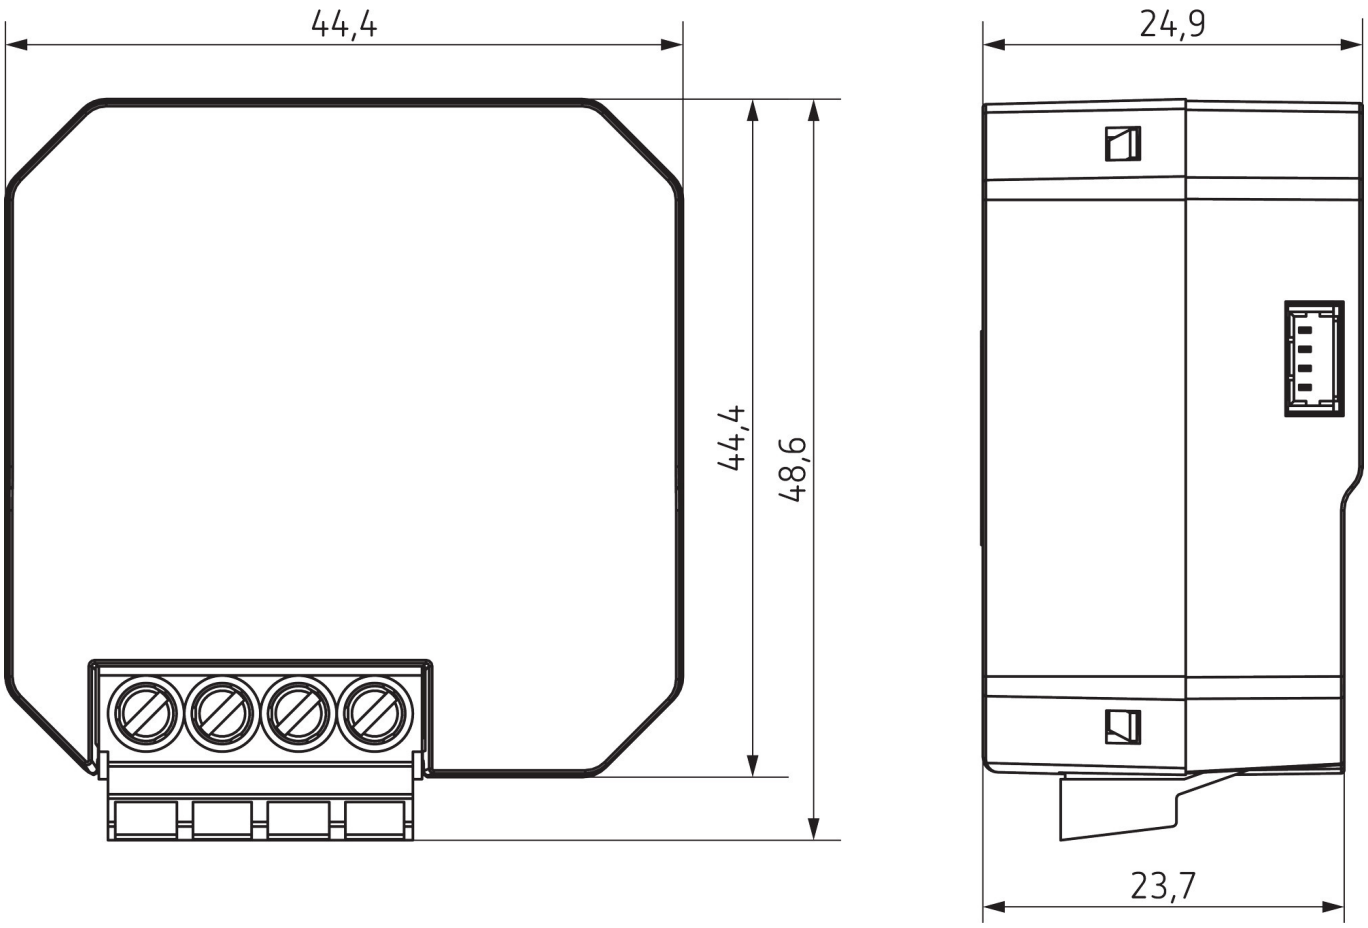

Accessories

Temperature sensor
Item no.: 9070321

Temperature sensor RAMSES IP 65
Item no.: 9070459

Actuator ALPHA 5 230 V
Item no.: 9070441

Flush-mounted temperature sensor
Item no.: 9070496

Accessories

RailFit H
Item no.: 9080090

