LUXORliving RF1

Item no.: 4800868

Smart Home
Flush-mounted actuators

Description

- Connects LUXORliving RF devices of a radio line with the twisted-pair bus
- Power supply via KNX bus voltage
- Supports long frames for "KNX Secure" and enables faster download of large applications in parallel
- Ranges of max. 30 m within the building are possible
- Has a repeater function, i.e. received telegrams are sent again to increase the range
- Download of the installation software LUXORplug at https://luxorliving.de/luxorplug

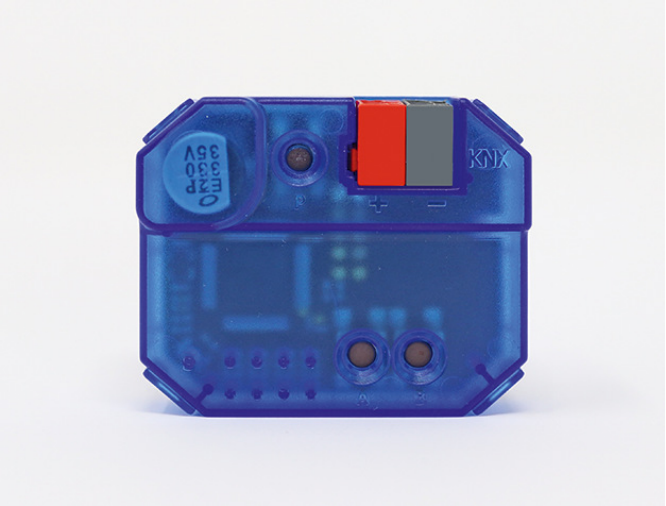

Technical data

	LUXORliving RF1
Operating voltage KNX	≤4 mA
Installation type	Flush-mounted

	LUXORliving RF1
Ambient temperature	-5°C ... 45°C
Protection class	III

Wiring Diagrams



LUXORliving RF1

Item no.: 4800868
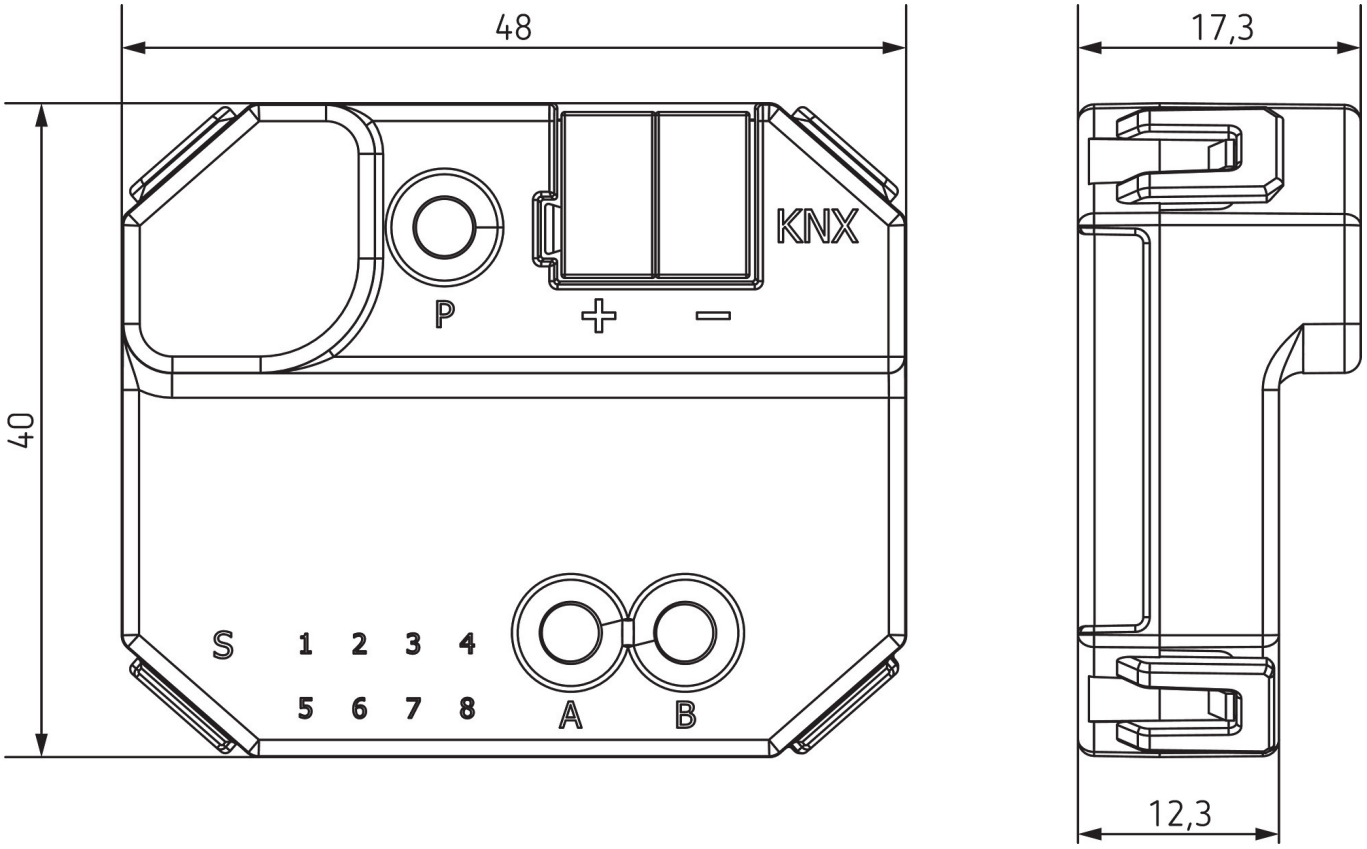
Scale Drawings