


KNX
Binary inputs

Description

- 2-way binary input push-button interface KNX TP
- Secure commissioning and communication through support of KNX Data Secure
- Identification of the wire pairs via color coding
- Connectable cable length up to 30 m
- Can be installed in flush-mounted sockets with conventional sensors/ switches
- Flexible LED controlling, thanks to increased output current of 3 mA commercially available LEDs and low current LEDs can be controlled
- Inputs can be reconfigured to outputs with parameterizable flashing and pulsing function
- Colour coding of wiring pairs

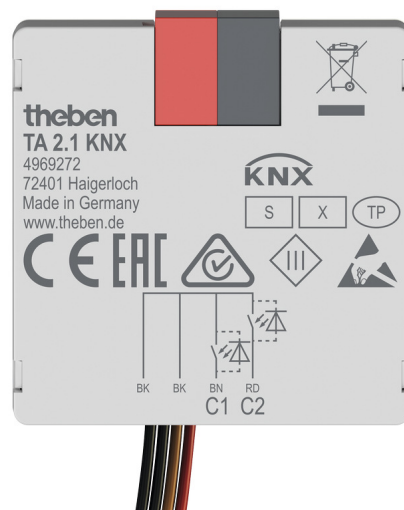

Technical data

TA 2.1 KNX	
Operating voltage KNX	Busspannung, ≤10 mA
Installation type	in flush-mounted socket
Type of connection	KNX bus terminal
Number of inputs	2
Max. cable length	30 m
Length connecting wires	25 cm

TA 2.1 KNX	
Contact current	0.5 mA
Reaction in case of bus recovery	Adjustable
Ambient temperature	-5°C ... 45°C
Type of protection	IP 20
Protection class	III

Scale drawings

