
# TA 6.1 KNX

## Item no.: 4969276

**KNX**
**KNX Secure**

## Description

- 6-way binary input push-button interface KNX TP
- 2 NTC inputs for detection of the actual temperature from -5 °C to +100 °C
- Secure commissioning and communication through support of KNX Data Secure
- Identification of the wire pairs via color coding
- Connectable cable length up to 30 m
- Can be installed in flush-mounted sockets with conventional sensors / switches
- Flexible LED controlling, thanks to increased output current of 3 mA commercially available LEDs and low curent LEDs can be controlled
- Inputs can be reconfigured to outputs with parameterizable flashing and pulsing function
- Colour coding of wiring pairs

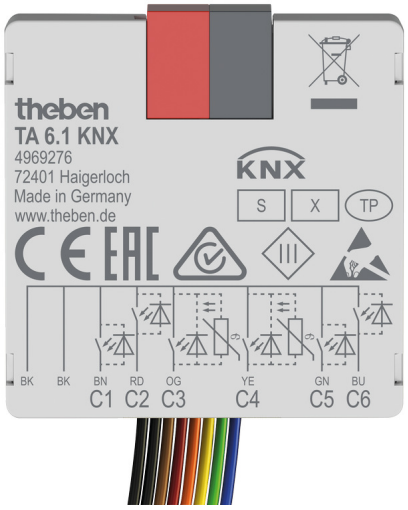


## Technical data


| | TA 6.1 KNX |
|---|---|
| Operating voltage KNX | Busspannung, ≤10 mA |
| Installation type | in flush-mounted socket |
| Type of connection | KNX bus terminal |
| Number of inputs | 6 |
| Max. cable length | 30 m |
| Length connecting wires | 25 cm |

| | TA 6.1 KNX |
|---|---|
| Contact current | 0.5 mA |
| Reaction in case of bus recovery | Adjustable |
| Ambient temperature | -5°C ... 45°C |
| Type of protection | IP 20 |
| Protection class | III |

# TA 6.1 KNX

Item no.: 4969276

## Scale Drawings

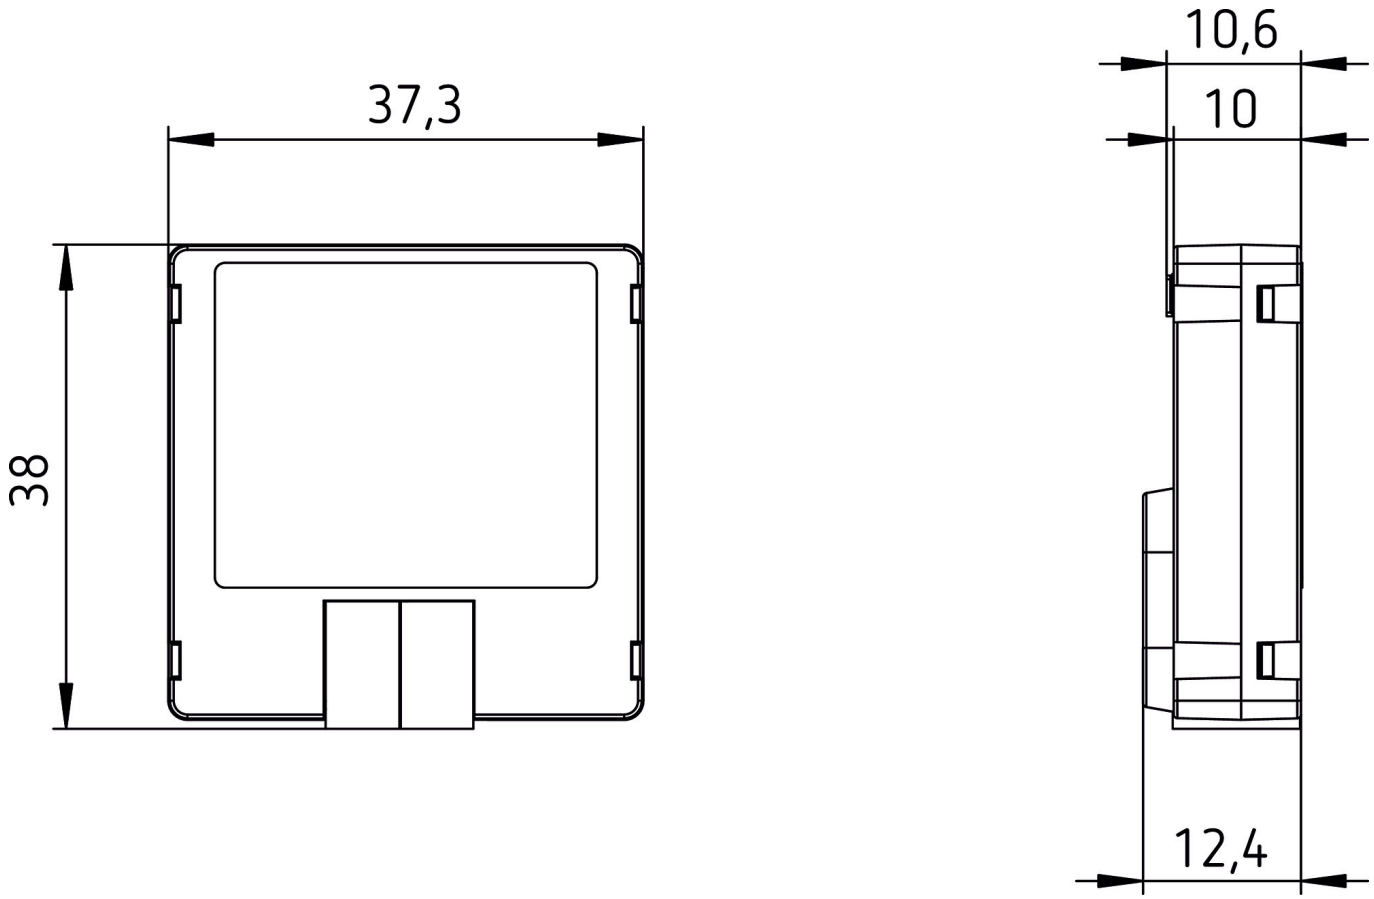



## Accessories

**Temperature sensor**
Item no.: 9070321



**Temperature sensor RAMSES IP 65**
Item no.: 9070459

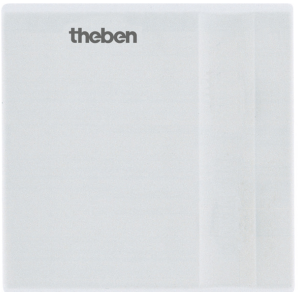


**Flush-mounted temperature sensor**
Item no.: 9070496

