

DIMAX 532 plus

Item no.: 5320001

theben

Time and light control Dimmer

Description

- Universal dimmer for R, L and C loads with automatic load detection
- Switch-on brightness can be saved individually
- Adjustable minimum brightness (required for ESL and LED)
- Multi-voltage input, e.g. for intercoms
- Low stand-by consumption
- Memory function in the event of power failure
- Automatic electronic overload and overheating switch-off
- Dimming switch-on function
- Permanent ON function (test function)
- No minimum load requirement
- Soft ON and Soft OFF protects the light
- The dimming output can be upgraded by using additional dimmboosters "DMB 1 T KNX" - dimming output 300 W/VA for each dimmbooster



Technical data

DIMAX 532 plus	
Operating voltage	230 V AC
Frequency	50 Hz
Width	1 modules
Installation type	DIN rail
Stand-by consumption	~0.2 W
Capacity loss max.	4.5 W
Incandescent/halogen lamp load	400 W
Transformer electronic (C)	300 W
Transformer inductive (L)	400 W

DIMAX 532 plus	
Energy saving lamps	Trailing edge: 400 W
Multi-function	-
Setting	Poti
Load detection	✓
Max. cable length	100 m
Ambient temperature	-30°C ... 50°C
Protection class	II
Type of protection	IP 20

Subject to technical changes and misprints

additional information at: www.theben.de/product/5320001


The load data are determined with exemplary selected illuminants and are therefore typical data due to the large number of available products.

DIMAX 532 plus


Item no.: 5320001



Connection example

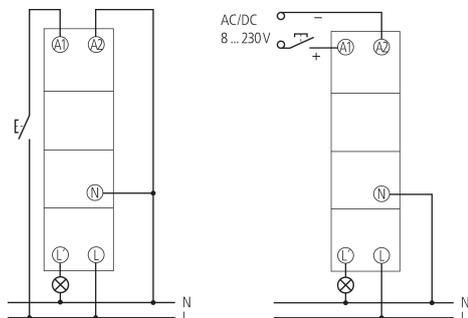

Scale drawings

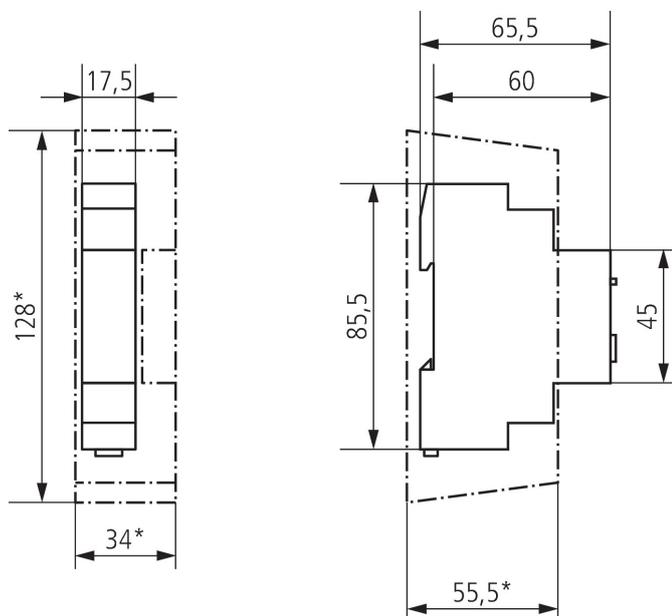

Accessories

Wall mounting kit 17,5 mm
Item no.: 9070065



Front panel kit
Item no.: 9070001



Compensation module LED
Item no.: 9070825



Subject to technical changes and misprints

additional information at: www.theben.de/product/5320001

The load data are determined with exemplary selected illuminants and are therefore typical data due to the large number of available products.