

DIMAX 540 plus B

Item no.: 5400130

theben

Time and light control Dimmer

Description


- Flush-mounted dimmer for R and C loads
- No neutral conductor necessary
- Cable length of up to 100 m possible, also suitable for two-way circuits with larger distances and multiple push buttons
- Easier selection of the optimal dimming value thanks to extended dimming speed of 5 seconds
- Optimised settings for LEDs and incandescent lamps
- Function minimum brightness (10% in state of delivery, adjustable)
- Small design, perfect for retrofitting
- Completely encapsulated electronics
- Temperature cut-off
- Overcurrent cut-off
- Short-circuit fuse
- Memory function saves the most recently set light level value and then dims to this value the next time it is switched on
- With softstart/softstop function
- Dimensions 25,5 x 26,4 x 10,4 mm

Technical data

	DIMAX 540 plus B
Operating voltage	230 V AC
Frequency	50 - 60 Hz
Installation type	Flush-mounted
Stand-by consumption	~0.34 W
Incandescent/halogen lamp load	150 W

	DIMAX 540 plus B
LED lamp 2-8 W	150 W
Setting	Push-button
Max. cable length	100 m
Ambient temperature	-10°C ... 45°C

Connection example

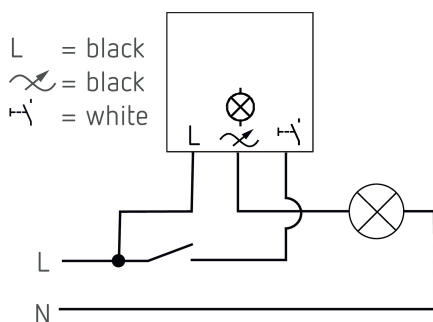

Subject to technical changes and misprints

additional information at: www.theben.de/product/5400130


The load data are determined with exemplary selected illuminants and are therefore typical data due to the large number of available products.

DIMAX 540 plus B

Item no.: 5400130

theben

Scale drawings

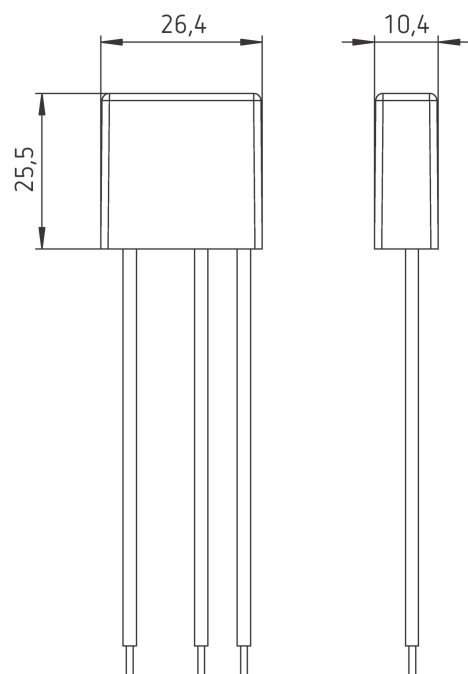

Accessories

Compensation module LED

Item no.: 9070825



Subject to technical changes and misprints

additional information at: www.theben.de/product/5400130

The load data are determined with exemplary selected illuminants and are therefore typical data due to the large number of available products.

15/06/2026

Page 2 of 2