

CHEOPS S 10m KNX

Item no.: 7319207



KNX
HVAC controller

Description

- Motorised KNX actuator for heating and cooling valves
- Integrated temperature sensor
- Pre-configured cable, length 10 m
- Integrated controller for efficient heating and cooling with one additional stage each
- High actuating force of up to 220 N with a maximum valve stroke of 8 mm
- 2 universal binary inputs, connection option e.g. for external temperature sensor, window contact, presence detector or push-button
- Integrated logic for up to 10 window contacts
- Can be used in the heating circuit distributor
- Integrated bus coupling unit
- Automatic valve adaptation
- Universally applicable due to large range of valve adapters
- 2 different valve adapters for the most common valves M30x1.5 and Danfoss included (VA 10, VA 100)
- Secure commissioning and communication through support of KNX Data Secure



Technical data

CHEOPS S 10m KNX	
Operating voltage KNX	Busspannung, ≤7,5 mA
Max. valve stroke	8 mm
Runtime	<20 s/mm
Installation type	Locks on valve adapter

CHEOPS S 10m KNX	
Behaviour in case of control signature failure	Moves to optional position
Ambient temperature	5°C ... 50°C
Stock temperature	-20°C ... 60°C
Medium temperature	≤100°C

Subject to technical changes and misprints
additional information at: www.theben.de/product/7319207
The load data are determined with exemplary selected illuminants and are therefore typical data due to the large number of available products.

CHEOPS S 10m KNX


Item no.: 7319207

theben

Technical data

CHEOPS S 10m KNX	
Dimensions	50 mm, 82 mm, 65 mm
Protection class	III according to EN 60730-2-14
Type of protection	IP 21

Scale Drawings

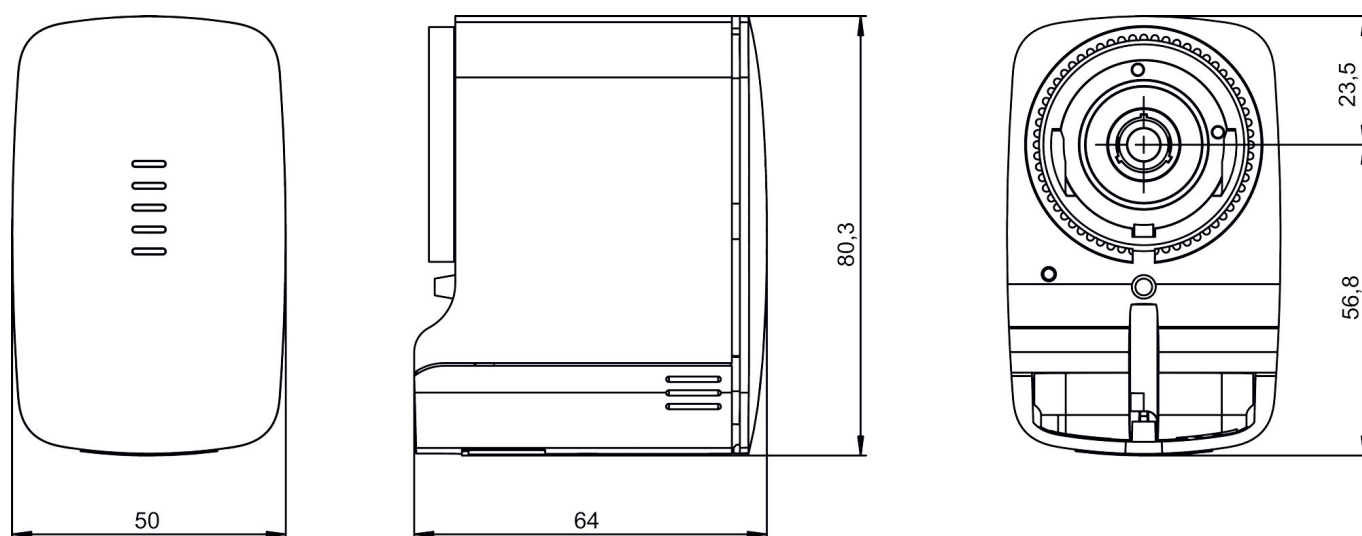


Accessories

Temperature sensor
Item no.: 9070321



Temperature sensor RAMSES IP 65
Item no.: 9070459

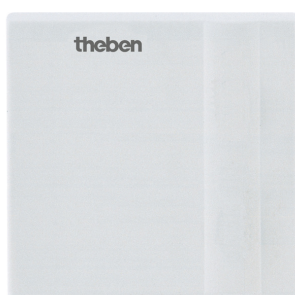

Valve adapter VA 80
Item no.: 9070437



Flush-mounted temperature sensor
Item no.: 9070496



Subject to technical changes and misprints

additional information at: www.theben.de/product/7319207

The load data are determined with exemplary selected illuminants and are therefore typical data due to the large number of available products.