

IPsecure Router KNX

Item no.: 9070770




KNX

System devices and sets

Description

- Router/interface/line coupler IP and KNX
- For data exchange between KNX and IP networks
- Support of KNX IP Secure
- Meets the requirements of the KNXnet/IP standard
- Complete filter table for all main groups (0... 31)
- Display of power failures on the bus (KNX IP Service)
- Unicast: Up to 10 devices can communicate via unicast
- Tunneling: 5 tunneling servers available (visualization, app ...)
- Firmware update possible (Theben IP Tool Software)
- Power supply: 12–30 V DC / PoE - IEEE 802.3af class 1

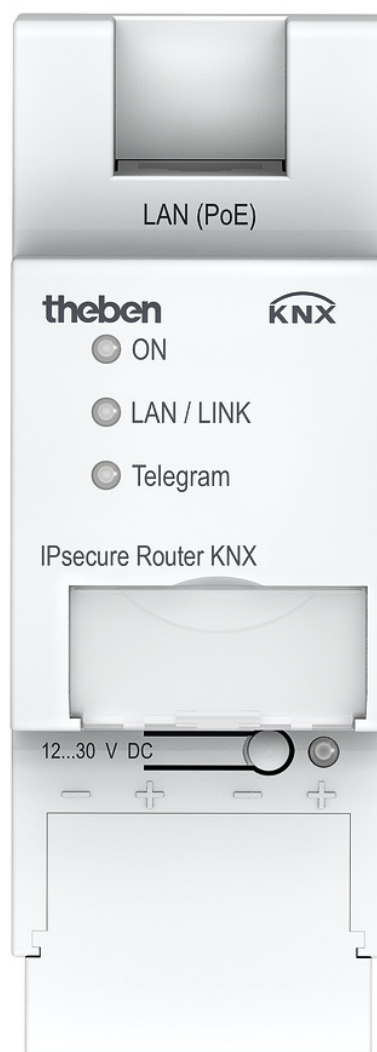

Subject to technical changes and misprints

additional information at: www.theben.de/product/9070770

The load data are determined with exemplary selected illuminants and are therefore typical data due to the large number of available products.

IPsecure Router KNX

Item no.: 9070770



Technical data

IPsecure Router KNX	
Operating voltage KNX	Bus voltage, ≤ 10 mA
Operating voltage	12 - 30 V DC
Width	2 modules
Installation type	DIN rail
Type of connection	Bus connection: KNX bus terminal RJ45 for LAN

IPsecure Router KNX	
Ambient temperature	-5°C ... 45°C
Stock temperature	-25°C ... 55°C
Protection class	II
Type of protection	IP 20