

# PS 640 mA T KNX


Item no.: 9070958



KNX  
System devices and sets

## Description

- 640 mA supply voltage
- 30 V DC auxiliary supply
- Power-supplying and monitoring of the KNX system voltage
- Reset key for 20 sec. bus reset
- Continuous short-circuit protection

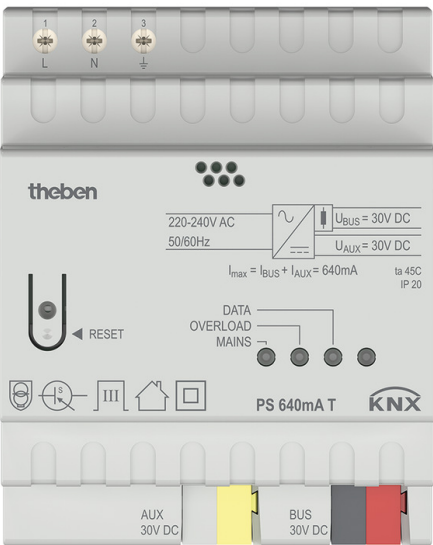

## Technical data

| PS 640 mA T KNX       |                                       |
|-----------------------|---------------------------------------|
| Operating voltage KNX | Bus voltage, $\leq 12$ mA             |
| Operating voltage     | 230 V AC - 240 V AC, 50 Hz - 60 Hz    |
| Frequency             | 50 - 60 Hz                            |
| Stand-by consumption  | $\leq 0.8$ W                          |
| Width                 | 4 modules                             |
| Installation type     | DIN rail                              |
| Type of connection    | KNX bus terminal                      |
| KNX output            | 1 line with integrated throttle drive |


| PS 640 mA T KNX                     |                             |
|-------------------------------------|-----------------------------|
| Nominal voltage KNX                 | 30 V DC, $\pm 2$ V, SELV    |
| Nominal current KNX                 | 640 mA                      |
| Uninterrupted short-circuit current | max. 1.4 A                  |
| Mains failure bridging time         | min. 130 ms                 |
| Ambient temperature                 | -5°C ... 45°C               |
| Protection class                    | II according to EN 60 730-1 |
| Type of protection                  | IP 20                       |

# PS 640 mA T KNX

Item no.: 9070958

**theben**

## Scale Drawings

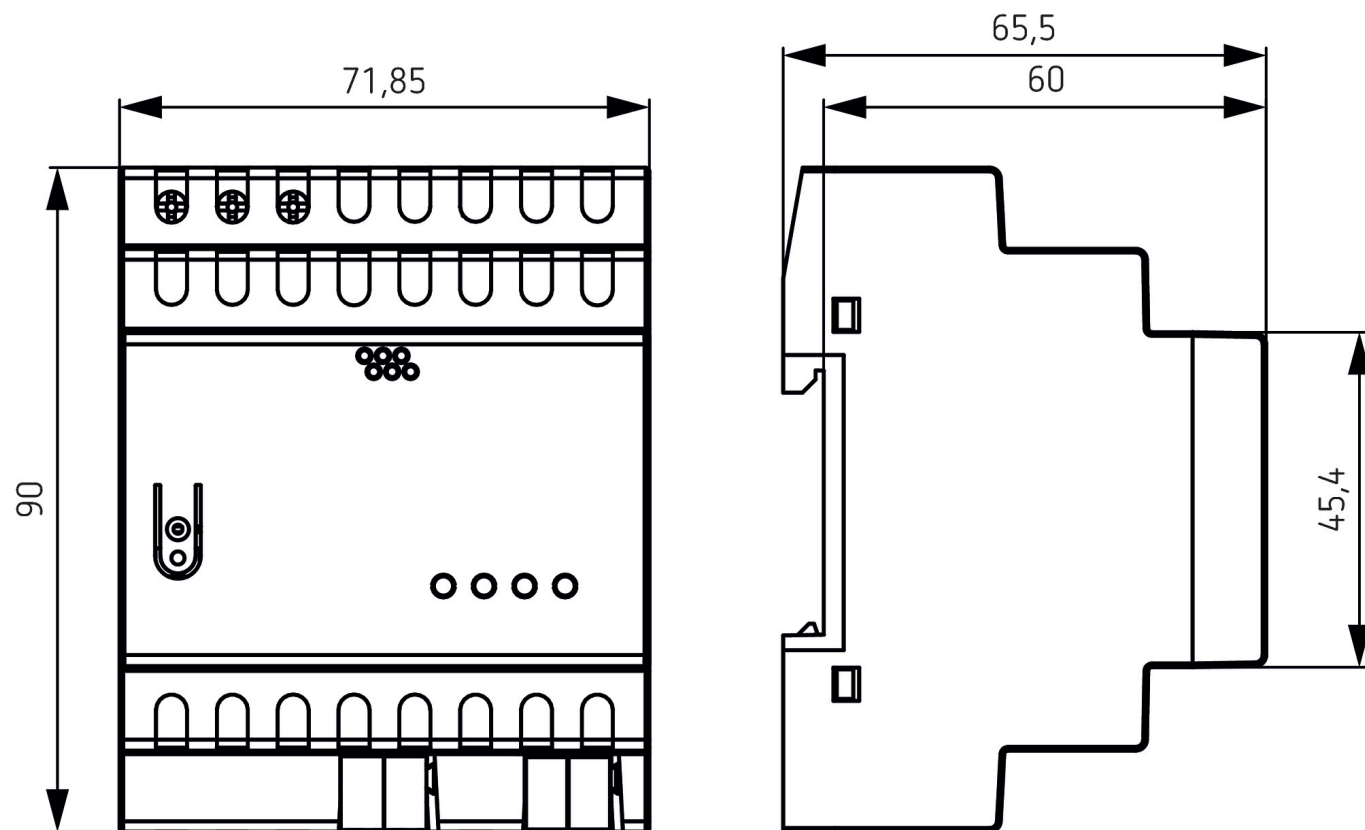

Subject to technical changes and misprints

additional information at: [www.theben.de/product/9070958](http://www.theben.de/product/9070958)

The load data are determined with exemplary selected illuminants and are therefore typical data due to the large number of available products.

27/08/2026

Page 2 of 2