

# Meteodata 140 S KNX

Item no.: 1409207

KNX  
Sensor technology

## Description

- Self contained outdoor weather station
- For measuring wind, rain, brightness and temperature
- For fully automatic blinds and sun protection control with automatic adjustment of blinds according to position of the sun
- Rain sensor with integrated heating
- The weather station can also be operated without mains supply. The heating of the rain sensor will not function then
- Measurement and evaluation directly on device
- Sun protection for up to 8 facades via 3 integrated brightness sensors
- 4 additional threshold channels for connection of external KNX sensors
- 6 logic channels
- Display of weather data e.g. with VARIA 826 KNX multi-function display




## Technical data

Meteodata 140 S KNX	
Operating voltage	110 - 230 V AC
Frequency	50 - 60 Hz
Operating voltage KNX	Bus voltage, $\leq 10$ mA
Stand-by consumption	$< 0.5$ W
Installation type	Wall installation
Measuring range brightness	1 - 100000 lx

Meteodata 140 S KNX	
Setting range temperature	-30°C ... 60°C
Measuring range wind speed	2 - 30 m/s
Ambient temperature	-20°C ... 55°C
Type of protection	IP 44
Protection class	II

## Connection example

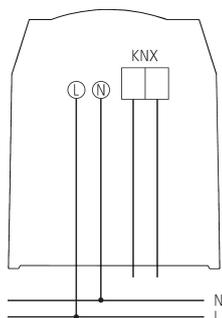

Subject to technical changes and misprints

additional information at: [www.theben.de/product/1409207](http://www.theben.de/product/1409207)


The load data are determined with exemplary selected illuminants and are therefore typical data due to the large number of available products.

# Meteodata 140 S KNX

Item no.: 1409207



## Scale drawings

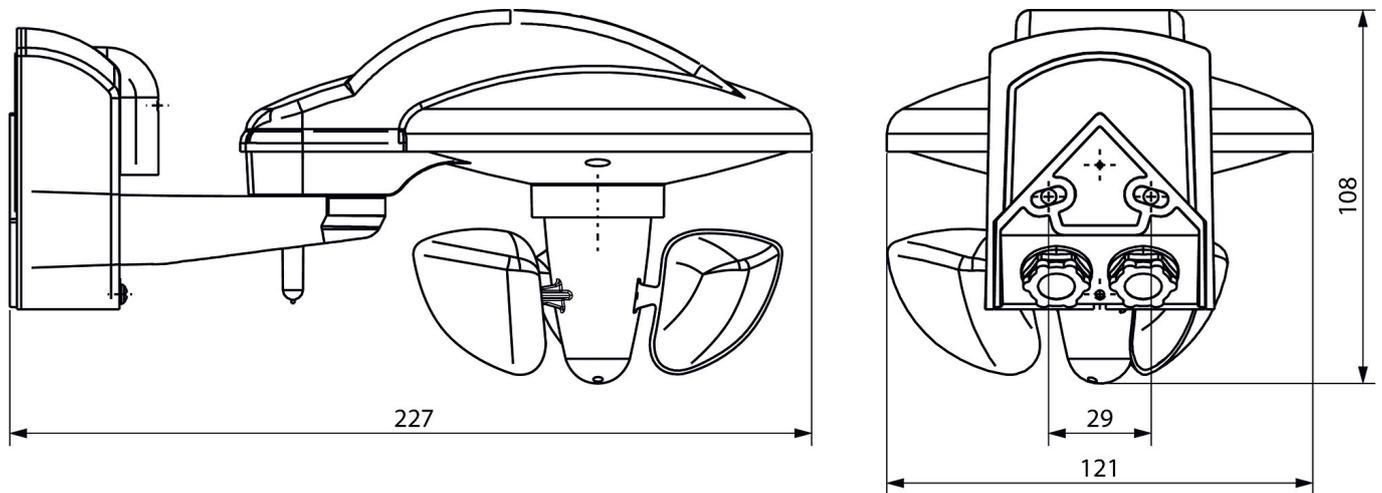

## Accessories

**Mast mounting S**  
Item no.: 9070928



**Mast mounting WML1**  
Item no.: 9070925



Subject to technical changes and misprints

additional information at: [www.theben.de/product/1409207](http://www.theben.de/product/1409207)

The load data are determined with exemplary selected illuminants and are therefore typical data due to the large number of available products.