LUXORliving M140

Item no.: 4800490

Smart Home
Weather sensors

Description

- Self contained outdoor weather station LUXORliving
- For measuring wind, rain, brightness and temperature
- Rain sensor with integrated heating
- For fully automatic blinds and sun protection control
- Measurement and evaluation directly on device
- Sun protection for up to 4 facades via 3 integrated brightness sensors
- Display of weather data e.g. with LUXORliving-App „LUXORplay"
- Download of the installation software LUXORplug at https://luxorliving.de/luxorplug





Technical data

	LUXORliving M140
Operating voltage	110 - 230 V AC
Frequency	50 - 60 Hz
Operating voltage KNX	Bus voltage, ≤10 mA
Stand-by consumption	<0.5 W
Setting range temperature	-30°C ... 60°C

	LUXORliving M140
Measuring range wind speed	2 - 30 m/s
Ambient temperature	-20°C ... 55°C
Type of protection	IP 44
Protection class	II

Scale Drawings

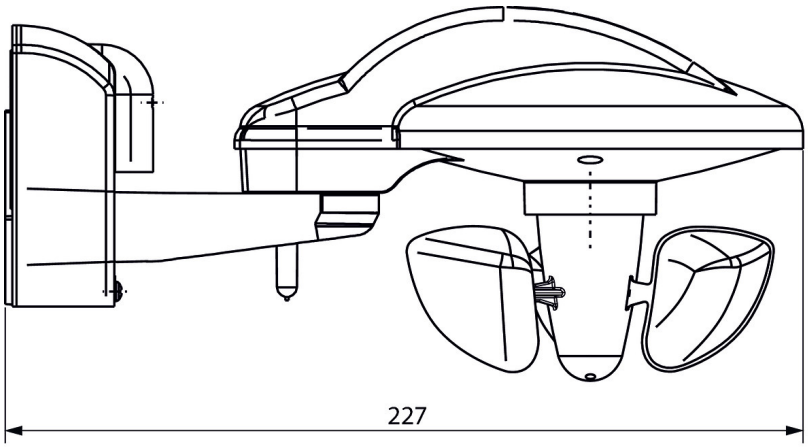

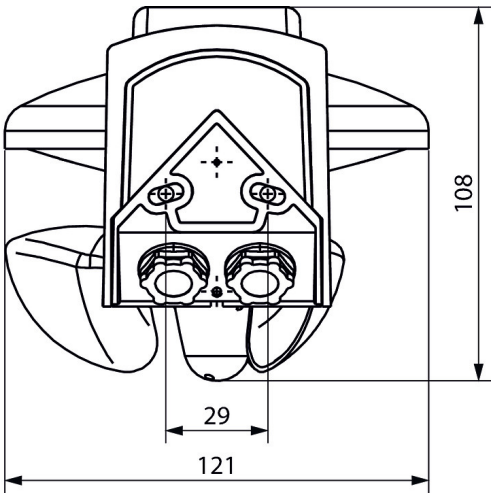

Accessories

Mast mounting S
Item no.: 9070928

