
LUXORliving PS 1 RF

Item no.: 4800625

Smart Home
Flush-mounted actuators

Description

- LUXORliving push-button switch actuator module, KNX RF
- 4 touch points
- Can be used universally in many 55 mm switch programmes
- Quick and easy conversion of conventional installations
- 1-gang or 2-gang rockers required as separate accessories, article numbers 9080026, 9080027
- Secure commissioning and communication through support of KNX Data Secure
- Download of the installation software LUXORplug at https://luxorliving.de/luxorplug

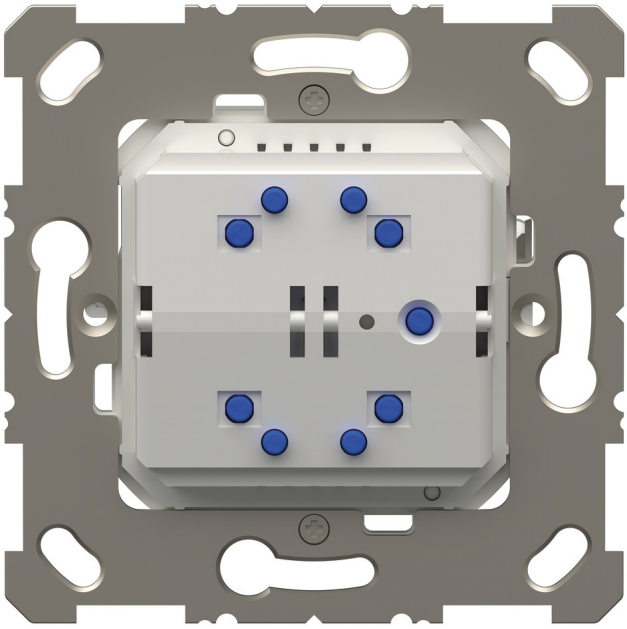


Technical data

	LUXORliving PS 1 RF
Operating voltage	230 V AC - 240 V AC, 50 Hz - 60 Hz
Frequency	50 - 60 Hz
Stand-by consumption	~
Installation type	Flush-mounted
Number of channels	1
LED lamp < 2 W	50 W

	LUXORliving PS 1 RF
LED lamp 2-8 W	600 W
LED lamp > 8 W	600 W
Ambient temperature	-5°C ... 45°C
Protection class	II


Wiring Diagrams




LUXORliving PS 1 RF

Item no.: 4800625

Scale Drawings

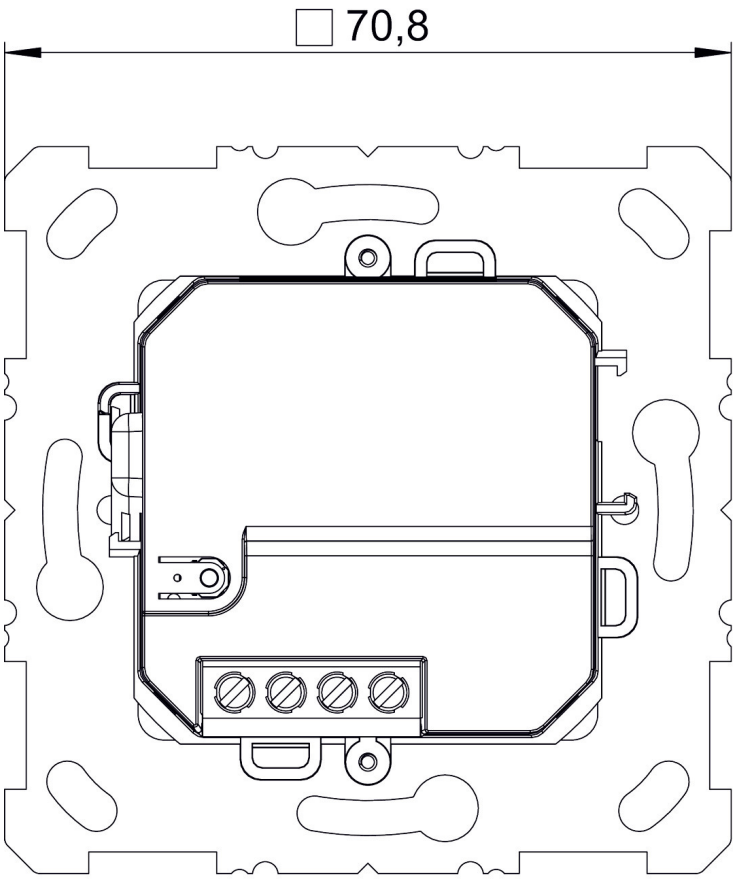

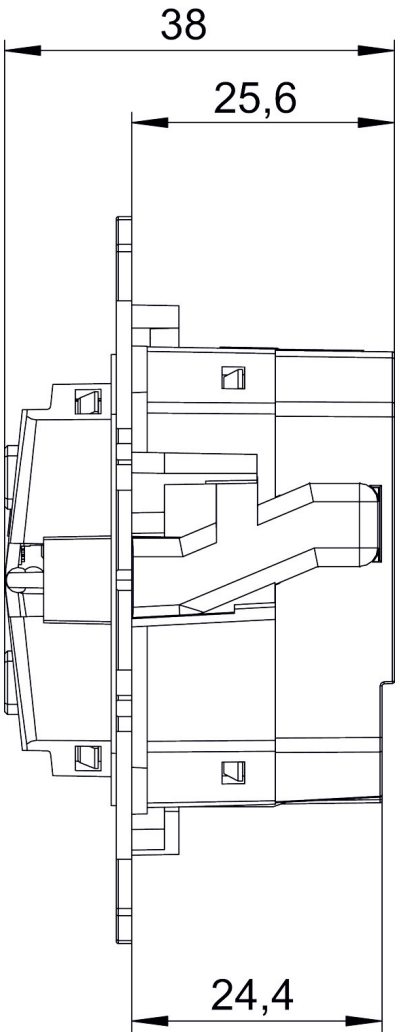

Accessories

Rocker 1-way WH
Item no.: 9080026



Rocker 2-way WH
Item no.: 9080027

