

Description




- LED spotlight with motion detector
- 1 LED spot with 10 W
- Additional light switch output (relay 230 V AC)
- Suitable for outdoor use
- Robust design with polycarbonate housing, stainless-steel mounting brackets and screws, aluminium cooling elements that are resistant to sea water and fully coated electronics
- Automatic lighting control based on presence and brightness
- 180° detection angle at a detection range of 12 m
- Sensor head can be turned by $\pm 90^\circ$ horizontally and 90° downwards
- Spotlight can be swivelled 45° downwards and 90° upwards
- Area limit via stickers
- Adjustable lux value and switch-off delay
- Settings can be changed without tools
- Manually switching on possible
- Optional purely twilight-dependent control
- Not suitable for dimming application


Technical data

Operating voltage	230 V AC
Frequency	50 – 60 Hz
Stand-by consumption	~0,5 W
Light measurement	Mixed light measurement
Colour	White
Switching output	Light
Installation type	Wall installation
Setting range brightness	2 – 200 lx
Colour temperature	4000 K, neutral white
Detection angle	180°
Installation height	2,5 m
Light switch-off delay	5 s-10 min
Remote controlled	–
Ambient temperature	-20 °C ... +40 °C
Protection class	I
Type of protection	IP 55


Connection example



This luminaire contains built-in LED lamps.

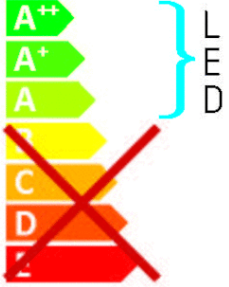


LED




The lamps cannot be changed in the luminaire.

Theben AG
theLeda EC
874/2012

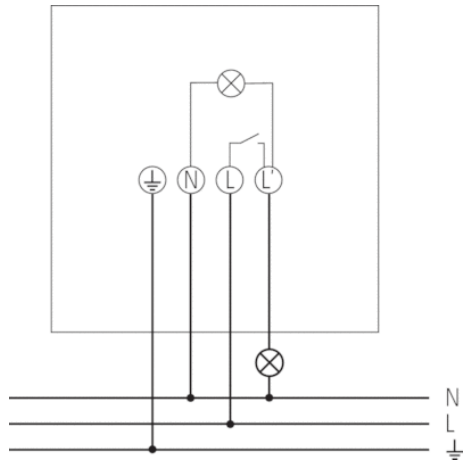

Detection range

Mounting height (A)	Head on to (r)	Diagonally (t)
2,5 m	4 m	12 m

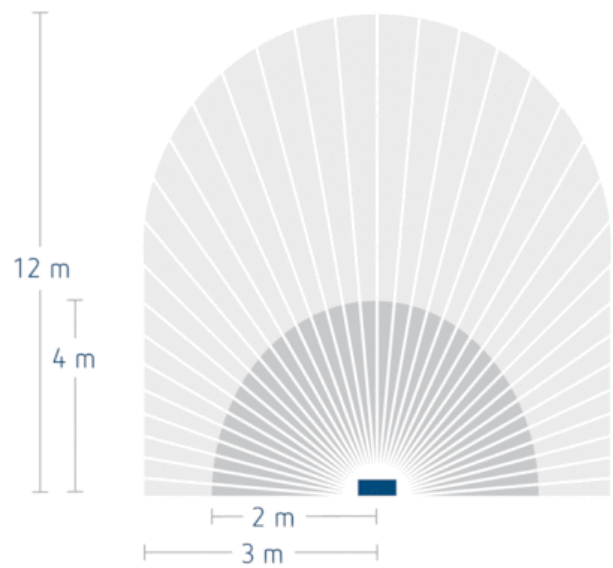

Scale drawings

